

Portable Hardness Testers Bench Hardness Testers

Specialized Hardness Testers Surface Roughness Testers

Ultrasonic Thickness Gauges Coating Thickness Gauges

Force Gauges Optical Visual Inspection Vibration Meters



### **Ordering Information**

For orders, returns, parts, or quotes, contact our **Customer Service Department** 

- All our customer service representatives have on-line access to prices and inventory information
- Parts available for 99% of our products.

For repairs and technical assistance contact our **Service Department** 

Our technical and product support department can assist you with difficult application problems and offer you trouble-shooting techniques.

#### **Service and Quality**

#### THE PHASE II ADVANTAGE:

#### **Top Quality Products**

Phase II offers only top quality products. Each new product passes a quality control checklist. we make sure our products live up to the high quality standards you have come to expect.

#### Free Technical Assistance

Our customer service representatives can answer your questions about our products, offer advice and recommend the proper accessories to complete your requests.

Monday through Friday 8:30 AM - 5:30 PM (EST) 24-hour fax (201)962-8353

Phase II Machine & Tool, Inc. 21 Industrial Ave.

Upper Saddle River, NJ. 07458 USA

Tel: (201) 962-7373 Fax: (201) 932-8353

General E-Mail: info@phase2plus.com

We accept Visa, MasterCard, Discover

**Prices:** F.O.B. New Jersey unless advised other-

wise. Minimum order is \$50 net.

Terms: Net 30 days, unless otherwise agreed

upon in writing.

**New Accounts:** Three (3) trade references and a bank reference are required to open an account. Visa, MasterCard and Discover are accepted. If immediate delivery is required, please include a check with your order, allow for COD shipment or charge to credit card.

<u>Claims</u>: Must be made within 5 days after receipt of merchandise. If it is a truck shipment, make sure the damage or short shipment is noted on the delivery receipt. Without proper notation, you accept it at your own risk.

**<u>Returns:</u>** All Phase II products must have authorization prior to return.

If product is not acceptable for any reason including application issues and demonstrations, authorization for return must be obtained within 10 days of receipt of product. Unit must be in same new condition it was received. Failure to do so will result in an automatic 15% restocking fee.

Returns after 30 days will not be accepted.

**Guarantee:** Phase II unconditionally guarantees items purchased, against manufacturer defect.

Liability: The value of the defective item(s) is the limit of our liability. All technical information has been supplied by the manufacturer for your convenience only. We do not warrant or represent that the merchandise complies with the provisions of any law—particularly the Walsh-Healey Public Contracts Act and the OSHA of 1970 and the regulations promulgated thereunder—unless the manufacturer so warrants. Dimensions may be changed without notice at the discretion of the manufacturer.

Orders: We ship 98% of our orders within 24 hours.

Phase II not responsible for typographical errors.

Call Today! 201-962-7373

www.phase2plus.com

## Product Index

DENCII HARDRESS IESIERS	AND THE RESIDENCE OF THE PARTY
Digital Indicator Upgrade19	DUROMETERS
Rockwell Hardness Tester 900-33120	Digital Durometers PHT-960 & PHT-98053
Rockwell Hardness Tester w/Digital Readout 900-331D21	Digital Durometers PHT-950 & PHT-97554
Tall Frame Rockwell Hardness Tester 900-332	ACCESSORIES FOR DUROMETERS55
Superficial Rockwell Hardness Tester 900-345	FORCE GUAGES
Superficial Rockwell H/T w/Digital Readout 900-345D	Analog Force Gauges w/Max Hold
TWIN Rockwell/Superficial Rockwell H/T 900-37525	Support Stand for Above72
<b>New!</b> Digital Motorized Superficial Rockwell H/T 900-34626	PORTABLE HARDNESS TESTERS
<b>New!</b> Digital Motorized Rockwell H/T 900-36727	New! Ultrasonic/Leeb Hardness Tester
New! Digital Motorized Rockwell H/T 900-41028	Mini Ultrasonic Hardness Tester
New! Digital Motorized Rockwell H/T 900-41529	Portable Hardness Tester PHT-1800
Tall Frame Digital Motorized Rockwell/Superficial H/T 900-349 30	Hardness Tester w/Color Display PHT-19009
Tall Frame Digital Motorized Rockwell H/T 900-36631	Rugged Body Hardness Tester PHT-210010
Tall Frame version of above 900-38632	Economy Hardness Tester PHT-1700
<b>New!</b> TWIN Rockwell/Superficial Rockwell H/T 900-387 33	Hardness Tester w/Built-in Printer PHT-3500
<b>New!</b> TWIN Rockwell/Superficial Rockwell H/T 900-388 34	Mini Integrated Hardness Tester PHT-3300
New! Universal Hardness Tester 900-45035	Gear teeth portable hard testers PHT-1840/PHT-1740
Digital Motorized Brinell Hardness Tester 900-355	Large-porous castings portable hard testers
Tall Frame Brinell Hardness Tester 900-35637	PORTABLE HARDNESS TESTERS FOR LARGE ROUGH CASTINGS
New! Touch Screen Brinell Hardness Tester 900-357	PHT-1750 & PHT-1850
New! Z-Axis Brinell Hardness Tester 900-35839	ACCESSORIES FOR PORTABLE HARDNESS TESTERS
New! Z-Axis Brinell Hardness Tester w/Monitor 900-359 40	New! Semi-Portable Load Cell Rockwell Hardness Tester
Optical Brinell Reader PHT-500041	Control Control
Micro Vickers Hardness Tester 900-390 Series42	SPECIALIZED HARDNESS TESTER
Micro Vickers Hardness Tester 900-391 Series43	Coating Hardness Tester PHT-995
Dual Penetrator Micro Vickers Hardness Tester 900-392	SURFACE ROUGHNESS TESTERS-PROFILOMETERS
Digital Macro Vickers Hardness Tester 900-398	Pocket Surface Roughness Gauge SRG-200057
New! Touch Screen Macro Vickers H/T 900-39946	Advanced Function Surface Roughness Gauge SRG-4600 58-59
ACCESSORIES	Surface Roughness Gauge SRG-400060
Measurement Software Packages for Vickers/Knoop	ULTRASONIC THICKNESS GAUGES
Micro/Macro/Knoop Vickers Hardness Testers48	Ultrasonic Thickness Gauge UTG-280061
Cabinet / Stand for all Hardness Testers49	Ultrasonic Thickness Gauge w/Thru Coat UTG-2900
<b>Rockwell &amp; Brinell </b>	Ultrasonic Thickness Gauge w/ A&B Scan, Thru Coat etc63
BORESCOPES	High Resolution Ultrasonic Thickness Gauge UTG-265064
Rigid Borescopes 7" & 17"	Economy Ultrasonic Thickness Gauge UTG-150065
COATING THICKNESS GAUGES	Accessories for Ultrasonic Thickness Gauges
Coating Thickness Gauge-Basic PTG-3500	VIBRATION TESTING
Coating Thickness Gauge w/Stats PTG-372569	Pocket Vibration Meters DVM-0500 & DVM-0600
Coating Thickness Gauge w/Color Screen PTG-400067	Digital Vibration Meter DVM-1000
Coating Thickness Gauge w/Flip Display PTG-420068	3-D Digital Vibration Meter DVM-2000
	Vibration Calibrator DVM-1600

# nami ardness Tester Features: Non-Destructive hand held hardness tester • Combines UCI and Leeb hardness testing in one state of the art device • Test steel with min thickness of .08" and unlimited max thickness • Blazing fast test results Rockwell, Brinell Vickers conversions shown on display

#### **PHT-6000 Series**

"Ultrasonic Contact Impedance" is based on a 136 degree diamond at the end of a vibrating rod being depressed into the test surface at a fixed load. The difference in Ultrasonic vibration frequency is then calculated into a hardness value. The UCI test procedure is slower than the Dynamic Impact style, however the "UCI" method of hardness testing is portable, easy and accurate. It also has its own advantages when utilized for certain testing applications. UCI testers are not restricted to large mass items like dynamic type testers. These units can test metals as thin as 1mm and at a hardness value as low as 20HRC (75HB). They also excel at performing hardness tests on larger, harder metals as well. Another reason for the rise in popularity is due to the fact that the UCI method is categorized as "Non-Destructive". That translates into less scrap parts/ lower mfg costs due to necessary inspections.

Large Memory w/USB Output

Choice of manual UCI probes; 1kg, 2kg, 5kg & 10kg
 Optional Motorized Probes: .30kg, .80kg, & 1kgf
 Available Impact Devices(Leeb) D, DC, D+15, G & DL

"Dynamic Impact" is based on the Leeb principle of hardness, developed by Dietmar Leeb in the 1970's. A spring loaded impact body is thrust to the test surface, effecting rebound. The speed of both the initial thrust and the rebound is measured in a non-contact mode. This is calculated as a Leeb hardness value and then automatically converted to Rockwell C, B, Brinell, Vickers and Shore Values. It has effectually brought easy, fast and accurate results to portable hardness testing.

## UCI/Dynamic Hardness Tester

UCI

SCALES-UCI	MEASUREMENT RANGE	TOLERANCE
ROCKWELL C	20-70 HRC	EXCEEDS OR CONFORMS WITH ASTM A 1038
ROCKWELL B	41-99 HR	EXCEEDS OR CONFORMS WITH ASTM A 1038
ROCKWELL A	61-85 HRB	EXCEEDS OR CONFORMS WITH ASTM A 1038
BRINELL	76-618 HB	EXCEEDS OR CONFORMS WITH ASTM A 1038
VICKERS	80-1599 HV	EXCEEDS OR CONFORMS WITH ASTM A 1038

LEEB

	SCALES-UCI MEASUREMENT RANGE		TOLERANCE
	ROCKWELL C	25-67 HRC	EXCEEDS OR CONFORMS WITH ASTM A 956
N	ROCKWELL B	59-99 HRB	EXCEEDS OR CONFORMS WITH ASTM A 956
	BRINELL	85-651 HB	EXCEEDS OR CONFORMS WITH ASTM A 956
1	VICKERS	83-976 HV	EXCEEDS OR CONFORMS WITH ASTM A 956
	SHORE 26-99HSt		EXCEEDS OR CONFORMS WITH ASTM A 956
	Leeb	170-960HLD	EXCEEDS OR CONFORMS WITH ASTM A 956

For use on rough surfaces. Below Ra 600µin

Can also test in the following scales:

\*HRN15 - HRN30 - HRN45 - HRT15 - HRT30 - HRT45

\*HRF - HK - HD.

UCI hardness tester w/manual probe			
DESCRIPTION MODEL NO. DESCRIPTION APPLICATION NOTES			
dness Tester w/1kgf Probe	For use on polished surfaces. Below Ra 125µin		
dness Tester w/2kgf Probe	For use on smooth surfaces. Below Ra 200µin		
dness Tester w/5kgf Probe	For use on machined surfaces. Below Ra 400µin		

UCI hardness tester w/motorized probe				
MODEL NO.	DESCRIPTION	MODEL NO. DESCRIPTION APPLICATION NOTES		
PHT-6030	UCI Hardness Tester w/.30kgf Probe	Best for checking coating layer hardness; Finished thin parts		
PHT-6080	UCI Hardness Tester w/.80kgf Probe	UCI Hardness Tester w/.80kgf Probe Best for smooth bearing type surfaces		
PHT-6100	UCI Hardness Tester w/1kgf Probe	Best for machined surfaces		

**Specifications:** 

MODEL NO.

PTHT-6001

**PHT-6002** 

**PHT-6005** 

PHT-6010

Hardness Range: HRC:20-70, HRB: 55-100, HB: 100-739, HV: 100-2970

**UCI** Hard

**UCI** Hard

**UCI** Hard

UCI Hardness Tester w/10kgf Probe

Scale Selection: Rockwell C (HRC); Rockwell B (HRB); Rockwell A (HRA); Brinell (HB); Vickers (HV); Leeb (HLD) and many more

Tolerance: Exceedxs or conforms to relevant ASTM Standard
 Display Type: LCD Color Screen w/Backlight, adjustable brightness

• Language Selection: English, German, Chinese, Spanish, etc.

• Data Logger: Letters, Numerals

Data Memory:
 2000 groups of measured data; 20 groups of calibration data

• Statistical Software: Supplied-can be saved in Word or Excel

• Data Output: USB – cable supplied

• Power Supply: Rechargeable Lithium Battery: Voltage-4.2V, 4800mAh

Auto Power Off: 5 minutes
 Recharging Time: Approx. 8 hours

• Battery Usage: Approx. 6 hours (no backlight)

Net Weight(base unit): 2lbs (w/probe)
Gross Weight 12 lbs


Unit Dimensions
 7.0 x 3.1 x 1.1" (160x80x30mm)
 Gross Dimensions
 13.7 x 17.7 x 5.9" (350x450x150mm)

Meets or Exceeds ASTM A1038 (UCI) and ASTM A956 (Leeb)

# 4 UCI/Dynamic Hardness Tester

#### Manual UCI Probe Specifications:

PROBE TYPE/MODEL	PHT-6001	PHT-6002	PHT-6005	PHT-6010
LOADING FORCE	1 kgf (10N)	2kg (20N)	5kg (50N)	10kg (98N)
PROBE DIAMETER	22mm	22mm	22mm	22mm
LENGTH	154mm	154mm	154mm	154mm
OSCILLATING ROD DIAMETER	2.4mm	2.4mm	3mm	3mm
SURFACE ROUGHNESS REQUIREMENTS	Ra<3.2µm	Ra<5 μm	Ra<10 μm	Ra<15 μm
µm=Metric µin= Inch	(Ra<125 µin)	(Ra<197 µin)	(Ra<393 µin)	(Ra<590 µin)
MIN WEIGHT OF TEST SAMPLE	0.3kg (.66lbs)	0.3kg (.66lbs)	0.3kg (.66lbs)	0.3kg (.66lbs)
MINIMUM THICKNESS OF SAMPLE	2mm (.08")	2mm (.08")	2mm (.08")	2mm (.08")





#### Motorized UCI Probe Specifications:

PROBE TYPE/MODEL	PHT-6030	PHT-6080	PHT-6100
LOADING FORCE	.30kg (3N)	.80kg (8N)	1kgf (10N)
PROBE DIAMETER	46mm	46mm	46mm
LENGTH	198mm	198mm	198mm
OSCILLATING ROD DIAMETER	3.7mm	3.7mm	3.7mm
SURFACE ROUGHNESS REQUIREMENTS	Ra<3.2µm (Ra<125 µin)	Ra<5 μm (Ra<197 μin)	Ra<8 µm (Ra<314 µin)
MIN WEIGHT OF TEST SAMPLE	0.3kg (.66lbs)	0.3kg (.66lbs)	0.3kg (.66lbs)
MINIMUM THICKNESS OF SAMPLE	2mm (.08")	2mm (.08")	2mm (.08")






1311111		16.016	I III II II II
	IION L	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
111231		43	181111

HARDNESS	.30KG MOTORIZED	.80KG MOTORIZED	1 KG MOTORIZED	1 KG MANUAL	2 KG MANUAL	5 KG MANUAL	10 KG MANUAL
800HV	4	5	7	7	10	15	22
600HV	4	5	8	8	11	18	25
500HV	5	6	9	9	12	19	27
300HV	6	8	11	11	16	25	35
100HV	10	13	19	19	27	43	61

	1 3	· · ///		
IMPACT DEVICES	D/DC/DL	D+15	C	G
IMPACT ENERGY	11Nmm	11Nmm	3Nmm	90Nmm
MASS OF THE IMPACT BODY	5.5g	7.8g	3.0g	20g
	DL: 7.3g			
TEST TIP				
* Hardness	1600HV	1600HV	1600HV	1600HV
* Diameter	3mm	3mm	3mm	5mm
* Material		Tungsten	Tung	
		carbide	carbide	
IMPACT DEVICE				
* Diameter	20mm	20mm	20mm	30mm
* Length	147/86mm	162mm	141mm	254mm
* Weight	75/50g	80g	75g	250g
MAX. HARDNESS OF SAMPLE	940HV	940HV	1000HV	650HB
PREPARATION OF SURFACE				
* Roughness class ISO	N7	N7	N5	N9
* Max. roughness depth Rt	10 mm	10 mm	2.5 mm	30 mm
* Average roughness Ra	2 mm	2 mm	0. 4 mm	7 mm
MIN. WEIGHT OF SAMPLE				
* Of compact shape	5kg	5kg	1.5kg	15kg
* On solid support	2kg	2kg	0.5kg	5kg
* Coupled on plate	0.1kg	0.1kg	0.02kg	0.5kg
MIN. THICKNESS OF SAMPLE				
Suggested min. Thickness Range	12mm	10mm	10mm	12mm
* Min. thickness of layers	0.8mm	0.8mm	0. 2mm	-
INDENTATION OF TEST TIP				
With 300 HV				
* Diameter	0.54mm	0.54mm	0.38mm	1.03mm
* Depth	24 m m	24 m m	12 m m	53 m m
With 600 HV				
* Diameter	0. 45mm	0. 45mm	0.32mm	0.90mm
* Depth	17 m m	17 m m	8 m m	41 mmC
With 800 HV				
* Diameter	0.35mm	0.35mm	0.30mm	-
* Depth	10mm	10mm	m7mm	-

**Probe Support Stand MET-1000** 









Part No. PHT6000-511 Flat Support Ring (manual probe)



Part No. PHT6000-521 V-Groove Adapter (manual probe)



Part No. PHT6000-711 Std Support Cap (manual probe)



Part No. PHT6000-721 Deep Hole Adapter (manual probe)



Part No. PHT6000-731 Deep Hole Adapter (moto probe)



Part No. PHT6000-751 V-Groove Adapter (moto probe)



#### **SPECIAL APPLICATION IMPACT DEVICES**

#### Impact Device D Part No. PHT1800-100

Universal standard device: Use for the majority of hardness testing assignments

#### Impact Device DL Part No. PHT1800-115

Needle front section .109" diameter x 1.96" length Measurements in extremely confined spaces

#### Impact Device G Part No. PHT1800-125

Enlarged test tip: For use on solid heavy components such as; rough castings and forgings. Brinell only.

#### Impact Device DC Part No. PHT1800-120

Extremely short impact device

Used for very confined spaces such as holes, cylinders, internal measure-

#### Impact Device D+15 Part No. PHT1800-110

Slim front section with coil set back.

Hardness measurements in grooves, recessed surface.

#### **Impact Device C**

A reduced energy impact device for measuring the hardness of Case Hardened Steel only. Applies a small superficial indentation.

Weight: 2.6ozº

Part No. PHT1800-130

# Optional Test Blocks for 6000 Series

#### **NIST Certified Test Block Kit**

Part No. 900330-9410

Includes: 1pc HRC 20's 1pc HRC 40's 1pc HRC 60's



#### Aluminum/Brass Rockwell Blocks

L -				
PART NO.	DESCRIPTION	SHAPE	RANGE	COMMENTS
900330-9414AH	Rockwell B	Square	80's	Made in USA Aluminum
900330-9414AL	Rockwell B	Square	50's	Made in USA Aluminum
900330-9418H	Rockwell E	Square	90's	Made in USA Aluminum
900330-9418L	Rockwell E	Square	60's	Made in USA Aluminum
900330-9414BH	Rockwell B	Square	80's	Made in USA Brass
900330-9414BL	Rockwell B	Square	50's	Made in USA Brass



#### Standard Leeb Test Blocks

PART NO.	DESCRIPTION	RANGE
PHT1300-01	Standard Leeb "D" Test Block	750-800(HRC 50's)
PHT1300-02	Standard Leeb "D" Test Block	750-800(HRC 50's)
PHT1300-03	Standard Leeb "D" Test Block	590-670(HRC40's)
PHT1300-05	Standard Double Sided Leeb "D" Test Block	590-670(HRC40's)
PHT1100G-01	Standard Leeb "G" Test Block	490-570(HRC20's)



	NIST/ASTM Certified Leeb Test Blocks: Comes with full form certificates			
	PART NO.	DESCRIPTION	RANGE	
	PHT130001-CERT NIST Certified Leeb "D" Test Block		750-800HLD (HRC 50's)	
	PHT130002-CERT	NIST Certified Leeb "D" Test Block	590-670HLD (HRC 40's)	
	PHT130003-CERT NIST Certified Leeb "D" Test Block PHT1100G-01C ASTM Certified Leeb "G" Test Block		490-570HLD (HRC 20's -90'sHRB)	
			400's HLG (200's HB)	

Brinell Test Blocks				
PART NO.	DESCRIPTION	SHAPE	RANGE	COMMENTS
900355-1000/150	3000kg	Round	150-250	Phase II std. (Steel)
900355-1000/250	3000kg	Round	250-500	Phase II std. (Steel)
900355-3010	3000kg	Rectangle	Low	Aluminum (USA)
900355-3020	3000kg	Rectangle	High	Aluminum (USA)
900355-3030	3000kg	Rectangle	100-200HB	Steel (USA)
900355-3040	3000kg	Rectangle	250-350HB	Steel (USA)
900355-3050	3000kg	Rectangle	500+HB	Steel (USA)



# Ultrasonic Hardness Tester 7

#### Standard Accessories:

- Base Instrument
- Calibrated Test Blocks
- Custom Carry Case
- Battery Charger
- Operation Manual

#### Specifications:

- Easy To Read Menu Operation
- Large LCD Display w/ Back Light
- USB Interface
- Automatic Mean Value
- Data Archive Capacity

#### **Specifications:**

Tolerance: +/- 3%

Minimum Thickness of sample: .040"

Materials: steel & cast steel, alloy tool

steel, stainless steel, aluminum, brass,

bronze, wrought copper alloy.

Battery type: NiMH Re-Chargeable

Operating temperature: 5-104 degrees F

Weight: 650g



Meets ASTM1038-10 specifications



### Non-Destructive Handness Testing!

MODEL	SCALES	PRESSURE FORCE	MEASUREMENT RANGE
MET-HRC15	Rockwell C	50N (5kgf)	20-70 HRC
MET-HRC50	Rockwell C	50N (5kgf)	20-70 HRC
MET-HB50	Brinell	50N (5kgf)	75-650 HB
MET-HV15	Vickers	10N (1.5kgf)	75-1000 HV

#### **MET-MINI**

Designed to test specific material in a chosen scale, the new PHASE II miniature ultrasonic hardness testers are capable of measuring surface hardness of metals with flat, thin, round or large surfaces. Accurate measurements of steels and aluminum are easily attained with these compact instruments. "

# Portable Hardness Tester







12 Piece Ring Set for Tough Radii PHT1500-300



Optional Accessories Pg. 17

Double-Sided Test Block
PHT1300-05



NIST Certified Test Block PHT130001-CERT



**Meets ASTM A956 specifications** 

#### PHT-1800

PHT-1800C

w/NIST Certified Test Block

#### PHT-1840 - W/DL IMPACT DEVICE

#### PHT-1850 - W/G IMPACT DEVICE

State of the art, digital tester is designed to test the hardness of large hard metal parts. Loaded with useful functions only found on high priced models the PHT-1800 is clearly setting a new industry standard by being the most accurate, economically priced hardness tester on the market today. Fast test speeds coupled with memory and output, this unit is a hands down winner whether you are out in the field or in the QC shop. The PHT-1800 can perform tests that easily convert to the most popular hardness scales, including Rockwell, Brinell, Vickers, Shore, etc. Meets ASTM A956 specifications

#### Operation:

- · Load the impact body
- Place the impact body on your test piece
- Push the button to begin testing and obtain reading

#### Standard Accessories:

- Base instrument
- Impact device D
- Calibrated test block
- Custom carry case
- Cleaning brush
- Operation manual

#### Optional accessories:

- Impact devices; DC, D+15, DL, G, C
- Special support rings
- Mini Printer

#### **Functions:**

- Easy to use keypad operation
- Auto identification of Impact Device

- Large LCD display with back light
- USB Ouput

**CHECK PAGE 16 FOR OPTIONAL IMPACT DEVICE PROBES** 


- Automatic conversions to: Brinell, Rockwell B & C, Vicker and Shore
- Automatic mean value as well as Min & Max values
- Battery Indicator
- Memory capacity (100 groups)

#### Specifications:

- Accuracy: +/- 0.5% HL
- Measuring range: 200-960 HL
- Materials: steel & cast steel, alloy tool steel, stainless steel, grey cast iron,
- Spheroidal iron, cast aluminum, brass, bronze, wrought copper alloy.
- Battery type: AA alkaline (4)
- Operating temperature: 5-104 degrees F
- Dimensions: 150 x 74 x 32mm
- Shipping Weight: 10 lbs.

### Portable Hardness Tester With Color Screen



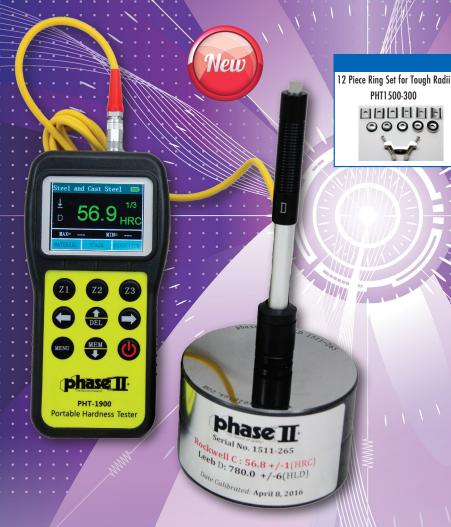

**Optional Accessories Pg. 17** 

Double-Sided Test Block PHT1 300-05



NIST Certified Test Block PHT130001-CERT



YEAR

#### Operation:

- Load the impact body
- Place the impact body on your test piece
- Push the button to begin testing and obtain reading

#### Standard Accessories:

- Base instrument
- Impact device D
- Calibrated test block
- Custom carry case
- Cleaning brush
- Operation manual

#### **Optional accessories:**

- Impact devices; DC, D+15, DL, G, C
- · Special support rings

#### **Functions:**

- · Easy to use keypad operation
- Auto identification of Impact Device

- Large LCD display with back light
- USB Ouput
- Automatic conversions to: Brinell, Rockwell B & C, Vicker and Shore
- Automatic mean value as well as Min & Max values
- · Battery Indicator
- Memory capacity (100 groups)

#### **Specifications:**

- Accuracy: +/- 0.5% HL
- Measuring range: 200-960 HL
- Materials: steel & cast steel, alloy tool steel, stainless steel, grey cast iron,
- Spheroidal iron, cast aluminum, brass, bronze, wrought copper alloy.
- Battery type: AA alkaline (4)
- Operating temperature: 5-104 degrees F
- Dimensions: 150 x 74 x 32mm
- Shipping Weight: 10 lbs.

#### **Meets ASTM A956 specifications**




#### **CHECK PAGE 16 FOR OPTIONAL IMPACT DEVICE PROBES**

#### PHT-1900

State of the art, digital portable hardness tester is designed to test the hardness of large hard metal parts. Clean crisp display shows the incredible functions that can only be found on this new portable hardness tester such as auto-probe detection, auto direction detector, single and multi-point calibration make the new 1900 the most versatile portable hardness tester in the industry.

# New RUGGED Aluminum Body Hardness Tester

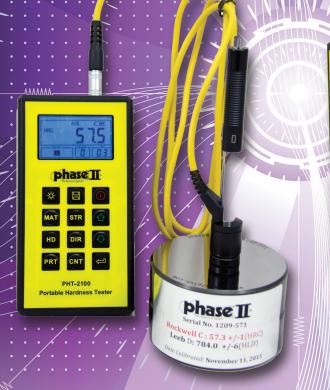



The PHT-2100 can perform tests that easily convert to the most popular hardness scales, including Rockwell, Brinell, Vickers, Shore, etc.

#### **Meets ASTM A956 specifications**

#### **PHT-2100**

Our new rugged "extruded aluminum" frame portable hardness tester is suited for rough environments such as mining facilities, pipeline, bridge and tower inspections, etc and is packed with features typically found on high end models only. This new leeb hardness tester is designed to test the hardness of large hard metal parts. Loaded with useful functions only found on high priced models the PHT-2100 is clearly setting a new industry standard by being the most accurate, economically priced hardness tester on the market today. Fast test speeds coupled with memory and output, this unit is a hand's down winner whether you are out in the field or in the QC shop.

Designed to test large hard parts: Example: Tool steel should be close to 1" thick of solid material

#### **Operation:**

- Load the impact device
- Place the impact device on your test piece
- Push the button to begin testing and obtain reading

#### **Standard Accessories:**

- Base instrument
- Impact device D
- Calibrated test block
- Custom carry case
- Cleaning brush
- Operation manual

#### **Optional accessories:**

- Impact devices; DC, D+15, DL, G, C
- Special support rings convex/concave surfaces

#### **Functions:**

- Easy to use keypad operation
- Auto identification of Impact Device
- Large LCD display with back light

- USB Ouput
- Automatic conversions to:
   Brinell, Rockwell B & C, Vicker and Shore
- Automatic mean value as well as Min & Max values
- Battery Indicator

**CHECK PAGE 16 FOR OPTIONAL IMPACT DEVICE PROBES** 

• Memory capacity (100 groups)

#### **Specifications:**

- Accuracy: +/- 0.5% (referred to L=800,
- Repeatability accuracy: +/- 4L units)
   L=Leeb
- Measuring range: 200-960 HL
- Materials: steel & cast steel, alloy tool steel, stainless steel, grey cast iron,spheroidal iron, cast aluminum, brass, bronze, wrought copper alloy
- Battery type: AA alkaline (2)
- Operating temperature: 5-104 degrees F
- Dimensions: 150 x 74 x 32mm
- Weight: 245 grams

## Economy Hardness Tester (1)





#### **Optional Accessories Pg. 17**

12 Piece Ring Set for Tough Radii PHT1500-300 



**Double-Sided Test Block** PHT1300-05



NIST Certified Test Block PHT130001-CERT



#### **Operation:**

- · Load the impact body
- · Place the impact body on your test piece
- · Push the button to begin testing and obtain reading

#### Standard Accessories:

- Base instrument
- Impact device D ("DL" PHT-1740) ("G" PHT-1750)
- Calibrated test block
- Custom carry case
- Cleaning brush
- Operation manual
- USB cable

#### **Functions:**

- Easy to use push button operation
- Large LCD display with back light
- Automatic conversions to: Brinell, Rockwell, Vicker and Shore
- Automatic mean value
- Data storage capacity

#### Specifications:

- Accuracy: +/- 0.5% HL
- Measuring range: 200-960 HL
- Materials: steel & cast steel, alloy tool steel, stainless steel, grey cast iron, spheroidal iron, cast aluminum, brass, bronze, wrought copper alloy.
- Battery type: AAA alkaline (2)
- Operating temperature: 5-104 degrees F
- Dimensions: 108 x 62 x 25mm
- · Shipping Weight: 11 lbs.

#### **CHECK PAGE 16 FOR OPTIONAL IMPACT DEVICE PROBES**

#### PHT-1700

Loaded with features, this economically price hardness tester is capable of measuring the surface hardness of a broad variety of metals on flat and round surfaces. This instrument comes complete with the universal D impact device, calibrated test block and rugged carry case.

#### PHT-1740

Same base instrument as the PHT-1700 but comes supplied with the "DL" impact device for testing of gear teeth, grooves and other confined applications. See page 15.

#### PHT-1750

Same base instrument as the PHT-1700 but comes supplied with the "G" impact device for testing of large castings and rough porous parts. See page 15.

## 12 Portable Hardness Tester w// Printer



The PHT-3500 can perform tests that easily convert to the most popular hardness scales, including Rockwell, Brinell, Vickers, Shore, etc.



**Meets ASTM A956 specifications** 

12 Piece Ring Set for Tough Radii PHT1500-300 O O O O Optional Accessories Pg. 17

Double-Sided Test Block
PHT1300-05



NIST Certified Test Block PHT130001-CERT



#### **Operation:**

- Load the impact body
- Place the impact body on your test piece
- Push the button to begin testing and obtain reading

#### **Standard Accessories:**

- Base instrument
- Impact device D
- Calibrated test block
- Custom carry case
- Cleaning brush
- Operation manual

#### **Optional accessories:**

- Impact devices; DC, D+15, DL, G, C
- Special support rings

#### **Functions:**

- Easy to use keypad operation
- Auto identification of Impact Device
- Large LCD display with back light
- USB Ouput
- Automatic conversions to: Brinell, Rockwell B & C, Vicker and Shore
- Automatic mean value as well as Min & Max values
- Upper/Lower Limit Setting w/Alarm
- Battery Indicator
- Memory capacity (500 groups)

#### **Specifications:**

- Accuracy: +/- 0.5% HL
- Measuring range: 200-960 HL

- Minimum Thickness:< 0.5" (Steel)
- Materials: steel & cast steel, alloy tool steel, stainless steel, grey cast iron,
- spheroidal iron, cast aluminum, brass, bronze, wrought copper alloy.
- Battery type: 6V NiMh Rechargeable
- Battery charger: 9V/500mA
- Continuous working period of about 150 hours (With backlight off, no printing)
- Printing paper: width is (57.5±0.5)mm, diameter is 30mm
- Communication interface: USB1.1
- Operating temperature: 5-104 degrees F
- Dimensions: 212 x 80 x 32mm
- · Shipping Weight: 12 lbs.

#### **CHECK PAGE 16 FOR OPTIONAL IMPACT DEVICE PROBES**

#### **PHT-3500**

State of the art, digital tester is designed to test the hardness of large hard metal parts. Loaded with useful functions and a built in mini-printer the PHT-3500 is clearly the industry leader for fast accurate hardness testing with advanced thermal printing capabilities. Meets ASTM A956 Specifications

## Mini-Integrated Hardness Tester 13









#### **Technical Specifications:**

• Dimensions: 6.10" x 2.36" x 1.49" (155 X 60 X 38mm)

• Impact Device: D/DL

• Impact Energy: 8 Ft-Lbs (11nm)
• Test Tip: Tungsten Carbide

• Measuring Accuracy: +- 0.8% (Corresponding To +- 1 Hrc At Hrc=58)

Max. Hardness Of Sample: 980hv
Shipping Weight: 11 lbs.
Impact Direction: Any Angle

• Operating Temperature: 32 To 122 Degrees F (0 To 50 Degrees C.)

• Min. Weight Of Sample: 11 lbs / 5kg

• Min. Radius Of Curved Surface: 1.2in (30mm) (With Support Rings:11mm)

• Power Supply: 3.6V Lithium Rechargeable Battery



#### **Optional Accessories Pg. 17**

12 Piece Ring Set for Tough Radii PHT1500-300







NIST Certified Test Block PHT130001-CERT



#### PHT-3300 PHT-3340 W/ DL IMPACT DEVICE

The PHASE II hardness tester, Model No. PHT-3300 is an advanced integrated hardness tester distinguished by its very compact size, high accuracy, wide measuring range and simplicity of operation. It is suitable for testing the hardness of all metals and widely applied in many areas of industry.

The PHT-3300 as with all Leeb hardness testers, is designed to test very large hard parts. Steel should be close to 1" thick of solid material. Softer metals need even more mass.

The PHT-3300 hardness tester combines the universal impact device D and a data processor in a single unit. It automatically computes all Vickers, Brinell, Rockwell and Shore hardness values. USB output enables this new model to print any of it's memory from up to 500 groups. The impact direction can be set so that the accurate values can be achieved at any angle, even upside down! Statistical mean value is automatically provided.

The measuring method of the PHT-3300 is defined as "the quotient of the impact body's rebound velocity over its impact velocity". Optional accessories include various support rings to meet the requirements of specialized convex or concave applications. MEETS ASTM A956-12 SPECIFICATIONS.



#### PHT-1740

This dedicated unit is designed to test gear teeth and other difficult to access applications. The 1740 is an economically priced hardness tester that is loaded with the same features found on the base 1700 version. The 1740 hardness tester is capable of measuring the surface hardness of a broad variety of metals on flat and round surfaces. This instrument comes complete with a dedicated DL impact device, calibrated test block and rugged carry case.

#### PHT-1840

This dedicated unit is designed to test gear teeth and other difficult to access applications. The 1840 is loaded with the same features found on the base 1800 version which includes memory, USB output and software for downloading to your PC. The 1840 hardness tester is capable of measuring the surface hardness of a broad variety of metals on flat and round surfaces. This instrument comes complete with a dedicated DL impact device, calibrated test block and rugged carry case.

#### **PHT-3340**

This integrated unit is designed to test gear teeth and other difficult to access applications. The 3340 hardness tester is capable of measuring the surface hardness of a broad variety of metals on flat and round surfaces. This instrument comes complete with a dedicated DL impact device, calibrated test block and rugged carry case.

# Portable Hardness Testers 15 For Testing Porous Castings and Very Rough Surfaces



PHT-1750

#### **Meets ASTM A956 specifications**

#### Standard Accessories:

- Base instrument
- Impact device G
- Calibrated test block
- Custom carry case
- Cleaning brush
- Operation manual

IMPACT DEVICE	G
IMPACT ENERGY	90 Nmm
MASS OF THE IMPACT BODY	20g
TEST TIP	
* Hardness	1600HV
* Diameter	5mm
* Material	Tungsten Carbide
IMPACT DEVICE	
Diameter	30mm
Length	254mm
Weight	250g
MAX HARDNESS OF SAMPLE	650HB
PREPARATION OF SURFACE	
* Max. roughness depth Rt	30 µm
* Average roughness Ra	6.3 µm
PREPARATION OF SURFACE	
* Of compact shape depth Rt	15kg
* On solid support	5kg
* Coupled on plate	0.5kg
INDENTATION OF TEST TIP WITH 300 HV	
* Diameter	1.03mm
* Depth	53 µm
WITH 600 HV	
* Diameter	0. 90mm
* Depth	41 µm

#### **Specifications:**

PHT-1850

- Accuracy: +/- 0.5% HL
- Measuring range: 200-960 HL
- Materials: steel & cast steel, alloy tool steel, stainless steel, grey cast iron, spheroidal iron, cast aluminum, brass, bronze, wrought copper alloy.
- Battery type: AA alkaline (4)
- Operating temperature: 5-104 degrees F
- **Dimensions:** 150 x 74 x 32mm
- Shipping Weight: 20 lbs.

#### Operation:

- Load the impact body
- Place the impact body on your test piece
- Push the button to begin testing and obtain reading

#### **Functions:**

- Easy to use keypad operation
- Auto identification of Impact Device
- Large LCD display with back light
- Automatic mean value as well as Min & Max values
- Battery Indicator
- Memory capacity (100 groups)

#### PHT-1750/1850

#### **Hardness Testing for Rough Surfaces**

Incorporates the "G" impact device mated to the popular PHT-1700 & 1800 portable hardness testers. This combination allows the user to test large rough surface parts and readout in the Brinell hardness scale.

## 16 Impact Devices for Portable Hardness Testers

			VVM	
IMPACT DEVICES	D/DC/DL	D+15	C	G
IMPACT ENERGY	11Nmm	11Nmm	3Nmm	90Nmm
MASS OF THE IMPACT BODY	5.5g	7.8g	3.0g	20g
	DL: 7.3g			
TEST TIP				
* Hardness	1600HV	1600HV	1600HV	1600HV
* Diameter	3mm	3mm	3mm	5mm
* Material		Tungsten	Tung	
		carbide	carbide	
IMPACT DEVICE				
* Diameter	20mm	20mm	20mm	30mm
* Length	147/86mm	162mm	141mm	254mm
* Weight	75/50g	80g	75g	250g
MAX. HARDNESS OF SAMPLE	940HV	940HV	1000HV	650HB
PREPARATION OF SURFACE				
* Max. roughness depth Rt	10 mm	10 mm	2.5 mm	30 mm
* Average roughness Ra	2 mm	2 mm	0. 4 mm	7 mm
INDENTATION OF TEST TIP				
With 300 HV				
* Diameter	0.54mm	0.54mm	0.38mm	1.03mm
* Depth	24 m m	24 m m	12 m m	53 m m
With 600 HV				
* Diameter	0. 45mm	0. 45mm	0.32mm	0.90mm
* Depth	17 m m	17 m m	8 m m	41 mmC
With 800 HV				
* Diameter	0.35mm	0.35mm	0.30mm	-
* Depth	10mm	10mm	m7mm	-

#### "DC" Impact Device

Very short impact device for those confined areas, i.e. inside bores for internal measurements. Conforms to the D measuring range. Weight: 1.8oz

Part No. PHT1800-120

#### "D" Impact Device

Universal standard unit. Will handle the majority of hardness testing applications.

Weight: 2.6oz

Part No. PHT1800-100

#### "D+15" Impact Device

Very narrow contact area with a set back measurement coil. This device is used to measure hardness in grooves and recessed surfaces.

Weight: 2.8oz

Part No. PHT1800-110

#### "G" Impact Device

This device has an enlarged test tip, and an increased impact energy range (approx. 9 times the D, 72 ft-lb.). Can be used on lower quality finishes for measuring hardness in the Brinell range only (max. 650 HB). Designed to be used with heavy components such as heavy castings and forgings.

Weight: 8.8oz

Part No. PHT1800-125

#### "DL" Impact Device

This model features a needle front section with a diameter of 4mm and a length of 50mm. It is suitable for testing in extremely confined spaces, the base of grooves and on special components such as as gear wheels. For use on steel and cast steel only!

Weight: 3.0oz

Part No. PHT1800-115

#### "C" Impact Device

A reduced energy impact device for measuring the hardness of Case Hardened Steel only. Applies a small superficial indentation. Weight: 2.602<sup>2</sup>

Part No. PHT1800-130



## Leeb Test Blocks and 12 pc. Ring Set 17





#### Standard Leeb Test Blocks:

	Model	Description	Range
•	PHT1300-01	Standard Leeb "D" Test Block	750-800HLD (HRC 50's)
•	PHT1300-02	Standard Leeb "D" Test Block	590-670HLD (HRC 40's) 590-670HLD
	PHT1300-03	Standard Leeb "D" Test Block	490-570HLD (HRC 20's -90'sHRB)
	PHT1300-05	Standard Double Sided Leeb "D" Test Block	750-800HLD (HRC 50's)
>	PHT1100G-01	Standard Leeb "G" Test Block	400's HLG (200's HB)

#### NIST/ASTM Certified Leeb Test Blocks: Comes with full form certificates

Model	Description	Range
PHT130001-CERT	NIST Certified Leeb "D" Test Block	750-800HLD (HRC 50's)
PHT130002-CERT	NIST Certified Leeb "D" Test Block	590-670HLD (HRC 40's)
PHT130003-CERT	NIST Certified Leeb "D" Test Block	490-570HLD (HRC 20's -90'sHRB)
PHT1100G-01C	ASTM Certified Leeb "G" Test Block	400's HLG (200's HB)



### 12pc Universal Support Ring Set PHT1500-300

This kit comes complete with 6-concave rings, 5 convex rings and 1-small stand for difficult to test round or curved parts.

## 18 Portable Rockwell Hardness Tester



Load Cell, Closed Loop, Rockwell Hardness Tester!

Touch Screen Functions w/One Touch
Testing Feature!

Meets ASTM E18 and E110
For NADCAP and API



### Entire Hardness Test Cycle Performed Automatically.

Ascent of Load Shaft • Minor Load Application • Test Load Application/Hold/Release
Rockwell Hardness Display • Descent of Load Shaft

- Direct Loading Method With Load-Cell Instead Of Dead Weight System.
- High Speed Test Cycle and Extremely Accurate Loading Control
- Automatic conversions to HB, HV, Superficial Rockwell Scales
- Touch Screen selectable system
- Upper/Lower Limit Settings

Minor Load	10 Kgf
Major Load	60 Kgf, 100 Kgf, 150 KGF
Test Force Application	Load Cell Closed Loop
Test Force Control	Motorized
Results Display	Hi Def LCD Digital Readout
Resolution	0.1HR
Minimum Thickness of sample	.56mm (0.024") STEEL
Throat Depth	5.90"
Height	170mm
Width	320mm
Depth	230mm
Weight	23 lbs

#### Features:

- Closed Loop Load cell control system affords highly sensitive and accurate readings
- Touch screen interface allows all functions to be easily set in the field
- True portability when paired with capable battery pack.
- Minimum specs shown below

kVA(rated output capacity): 1000VA/600W

Output voltage AC: 110V

Input voltage AC: 110V

Battery capacity: 12V/7AH \*2 (or other capacity of your choice)

- Data Output: Supplied with flash drive for print out in Excel format
- Conversions: Superficial Rockwell, Brinell & Vickers

#### Accessories Included:

- C-scale Diamond Indenter
- 1/16" Ball Indenter
- 2- HRC test Blocks
- 1- HRB Test Block
- Portable Power Inverter
- Cast Iron Base
- Operation Manual
- Calibration Certificate

#### **PHT-7000**

This portable Rockwell hardness tester with fully automated load/unload procedures affords highly sensitive and accurate readings. Micro computer controlled Touch Screen with USB output to PC. The PHT-7000 portable Rockwell hardness tester offers programmable scale conversions, dwell times, statistical capabilities and test counter. Capable of testing in the most popular Rockwell hardness scales

## Digital Rockwell Hardness Indicator 19





- Resolution: 0.1 HR
- Replace manual indicator directly
- Data memory is up to 999 readings
- Ready to measure immediately without calibration
- Scales convert automatically
- Auto power off

3 DIFFERENT MODELS AVAILAB





Accuracy	±0.5HR	
Resolution	0.1 HR	
Display	128 x 64 Graphic LCD with backlight	
Memory	999 readings	
Scales 900330-DI/ 900331-DI	HRC, HRA, HRB, HRD, HRE, HRF, HRG, HRK, HRH,	
900345-DI	HR15N, HR3ON, HR45N, HR15T, HR3OT, HR45T	
Convert Scales	HB, HV	
Power	Ni-H Rechargeable battery pack	
Charger	Input: 100~240/50~60Hz; output 5V 1A/DC	
Operating Environment	Temperature: -10°C~+50°C; Humidity: 20%~85%	
Storage Environment	Temperature: -30°C~+70°C; Humidity: 5%~95%	
Dimensions	114 x 37 mm	
Weight	420g	
Accessories	Charger	
Standard	ASTM E18, ISO 6508	

900330-9500 Digital Indicator for 900-330 & HR150

900331-9500 Digital Indicator for 900-331/Starrett 3814 & SPI 15-817-0

900345-9500 Digital Indicator for 900-345

## 20 Rockwell Scale Hardness Tester



#### **Included Accessories:**

- C-scale Diamond Indentor
- 1/16" Ball Indentor
- 3- HRC Test Blocks
- 1- HRB Test Block
- 1-HRA Test Block
- Flat Anvil 2.5" (63mm)
- Std. Vee Anvil
- H/D Accessory Case
- Dust Cover

#### **Options:**

 NIST/ASTM certified test blocks, penetrators and kits are available.
 Please refer to pages 48-52.

PLEASE CONTACT US FOR DETAILS.



#### 900-331

This hardness tester comprises the very best in "state of the art" design coupled with dynamic precision only found at Phase II. The 900-331 Rockwell scale hardness tester is easy to operate yet engineered to obtain highly sensitive and accurate readings. A perfect, rugged performer suited for almost any environment including heat treat facilities, tool rooms, workshops, laboratories and inspection labs. Lifetime technical support is included on all Phase II Hardness Testers. So test away with confidence and a level of accuracy you will only find at Phase II.

Minor Load	10Kgf
Major Load	60Kgf, 100Kgf, 150Kgf
Test Force Application	Dead Weight
Test Force Control	Hydraulic Dashpot System
Results Display	Analog Dial Gage
Vertical Capacity	6.7 in.
Throat Depth	6.6 in.
Height	30.0 in.
Width	8.50 in.
Depth	20.0 in.
Shipping Weight	242 lbs.

# Rockwell Scale Hardness Tester 21 with Digital Indicator





#### Included Accessories:

- C-scale Diamond Indentor
- 1/16" Ball Indentor
- 3- HRC Test Blocks
- 1- HRB Test Block
- 1-HRA Test Block
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Flat Anvil 5.87"
- Std. Vee Anvil
- H/D Accessory Case
- Dust Cover

Milhill		
	1	
_		

Minor Load	10Kgf	
Major Load	60Kgf, 100Kgf, 150Kgf	
Test Force Application	Dead Weight	
Test Force Control	Hydraulic Dashpot System	
Results Display	Analog Dial Gage	
Vertical Capacity	6.7 in.	
Throat Depth	6.6 in.	
Height	30.0 in.	
Width	8.50 in.	
Depth	20.0 in.	
Shipping Weight	242 lbs.	

#### **Options:**

 NIST/ASTM certified test blocks, penetrators and kits are available. Please refer to pages 48-52.
 PLEASE CONTACT US FOR DETAILS.

#### 900-331D

This hardness tester with digital indicator comprises the very best in "state of the art" design coupled with dynamic precision only found at Phase II. The 900-331D Rockwell scale hardness tester is easy to operate yet engineered to obtain highly sensitive and accurate readings. A perfect, rugged performer suited for almost any environment including heat treat facilities, tool rooms, workshops, laboratories and inspection labs. Lifetime technical support is included on all Phase II Hardness Testers. So test away with confidence and a level of accuracy you will only find at Phase II.

## 22 Tall Frame Rockwell Scale Hardness Tester

#### **Included Accessories:**

- C-scale Diamond Indentor
- 1/16" Carbide Ball Indentor
- 3- HRC Test Blocks
- 1- HRB Test Block
- 1-HRA Test Block
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Std. "V" Anvil
- Accessory Case

#### **Options:**

 NIST/ASTM certified test blocks, penetrators and kits are available.

Please refer to pages 48-52.

PLEASE CONTACT US FOR DETAILS.

#### Features:

- 153/4" Test height for extremely large parts
- Direct analog dial reading
- Advanced design, easy to operate
- Engineered to obtain highly sensitive and accurate readings





Minor Load	10Kgf
Major Load	60Kgf, 100Kgf, 150Kgf
Test Force Application	Dead Weight
Test Force Control	Hydraulic Dashpot System
Results Display	Analog Dial Gage
Vertical Capacity	15¾" in.
Throat Depth	5.5 in.
Height	33.0 in.
Width	18.0 in.
Depth	70.0 in.
Shipping Weight	200 lbs.

#### 900-332

The 900-332 Rockwell hardness tester is perfectly designed for that large part application. It is easy to operate and engineered to take highly sensitive and accurate readings. Perfect for the shop floor, labs, heat treat facilities and tool rooms.

## Superficial Rockwell Scale Hardness Tester





#### **Options:**

 NIST/ASTM certified test blocks, penetrators and kits are available.
 Please refer to pages 48-52.

PLEASE CONTACT US FOR DETAILS.

#### **Included Accessories:**

- N-scale Diamond Indentor
- 1/16" Steel Ball Indentor
- 3- HRN Test Blocks
- 3-HRT Test Blocks
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Spot Anvil .38" (10mm)
- Std. Vee Anvil
- Accessory Case
- Dust Cover

Test Force Control	Hydraulic Dash Pot
Results Display	Analog Dial
Vertical Capacity	6.7 in.
Throat Depth	6.6 in.
Height	28 in.
Width	8.9 in.
Depth	19.6 in.
Shipping Weight	190 lbs

#### Specifications:

Minor Load 3 Kgf

Major Load 15 Kgf, 30 Kgf, 45 Kgf
Test Force Application Dead Weight

#### 900-345

Just like our Phase II analog rockwell hardness tester, the 900-345 superficial rockwell hardness tester comprises the very best in "state of the art" design, coupled with dynamic precision only found at Phase II. Used for testing thin and soft metals in the superficial rockwell hardness scales, the 900-345 is easy to operate yet engineered to obtain highly sensitive and accurate readings. The 900-345 will offer unmatched repeatability in all superficial rockwell scales. A perfect, rugged performer suited for almost any environment including heat treat facilities, tool rooms, workshops, laboratories and inspection labs. So test away with confidence and a level of accuracy you will only find at Phase II.

# 24 Superficial Rockwell Hardness Tester with Digital Indicator





#### **Included Accessories:**

- N-scale Diamond Indentor
- 1/16" Steel Ball Indentor
- 3- HRN Test Blocks
- 3-HRT Test Blocks
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Spot Anvil .38" (10mm)
- Std. Vee Anvil
- Accessory Case
- Dust Cover

Test Force Control	Hydraulic Dash Pot
Results Display	Digital Dial
Vertical Capacity	6.7 in.
Throat Depth	6.6 in.
Height	28 in.
Width	8.9 in.
Depth	19.6 in.
Shipping Weight	190 lbs

#### Options:

 NIST/ASTM certified test blocks, penetrators and kits are available.
 Please refer to pages 48-52.
 PLEASE CONTACT US

**FOR DETAILS.** 

#### **Specifications:**

Minor Load 3 Kgf

Major Load 15 Kgf, 30 Kgf, 45 Kgf
Test Force Application Dead Weight

#### 900-345D

Just like our Phase II analog rockwell hardness tester, the the Phase II superficial rockwell hardness tester with digital indicator comprises the very best in "state of the art" design, coupled with dynamic precision only found at Phase II. Used for testing thin and soft metals in the superficial rockwell hardness scales, this tester is easy to operate yet engineered to obtain highly sensitive and accurate readings. The 900-345D will offer unmatched repeatability in all superficial rockwell scales. A perfect, rugged performer suited for almost any environment including heat treat facilities, tool rooms, workshops, laboratories and inspection labs. So test away with confidence and a level of accuracy you will only find at Phase II.









Minor Load	3Kgf	10Kgf
Major Load	15Kgf 30 Kgf 45 Kgf	60 Kgf 100 Kgf 150 Kgf
Test Force Application	Dead Weight	
Test Force Control	Manual	
Results Display	Dual Scale	Dial
Vertical Capacity	6.0 in.	
Throat Depth	5.5 in.	
Height	26 in.	
Width	18.2 in.	
Depth	9.4 in.	
Weight	165 lbs.	

#### Included Accessories:

- Diamond Conical Indentor
- 1/16" Ball Indentor
- 2- HRC Test Blocks
- 1- HRB Test Block
- 1- HR15N Test Block
- 1- HR30N Test Block
- 1- HR45T Test Block
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Std. Vee Anvil
- Accessory Case
- Dust Cover

#### **Options:**

 NIST/ASTM certified test blocks, penetrators and kits are available.
 Please refer to pages 48-52.

PLEASE CONTACT US FOR DETAILS.

#### Features:

- Direct analog dial reading
- Advanced design, easy to operate
- Engineered to obtain highly sensitive and accurate readings
- Conforms to ASTM E-18 Perfect for laboratories, workshops, tool rooms, inspection labs, etc.

### Test Rockwell and Superficial Rockwell Hardness in 1 Unit!

#### 900-375

Our latest Phase II analog Rockwell Hardness Tester, the 900-375, tests both Rockwell hardness and Superficial Rockwell hardness in one unit, with state of the art design and dynamic precision only found at Phase II. The Phase II Twin Rockwell/Superficial Rockwell hardness tester is ruggedly engineered to obtain highly sensitive and accurate readings. Conforming to ASTM E-18 Rockwell hardness standards, this hardness tester will offer unmatched repeatability in all Rockwell hardness scales. A perfect performer suited for any environment including heat treatment facilities, tool rooms, workshops, laboratories and inspection labs. Lifetime technical support is included with all Phase II Hardness Testers. So test away with confidence and a level of accuracy you will only find at Phase II.

# 26 Digital Superficial Rockwell Hardness Tester

Touch Screen Functions w/One **Touch Testing Feature!** 

Direct Loading Method With Load-Cell Instead Of Dead Weight System. High Speed Test Cycle and Extremely Accurate Loading Control

- Automatic conversions to HB, HV, Regular Rockwell Scales
- Touch Screen selectable system
- Upper/Lower Limit Settings

/ . /	/o o/ o /o o/ o /o o/	
Minor Load	3 Kgf	
Major Load	15 Kgf, 30 Kgf, 45 KGF	۶ •
Test Force Application	Load Cell Closed Loop	7
Test Force Control	Motorized	•
Results Display	Hi Def LCD Digital Readout	!
Resolution	0.01HR	•
Vertical Capacity	7.80"	•
Throat Depth	5.90"	٠
Height	700mm	,
Width	600mm	
Depth	250mm	
Weight	220 lbs	

#### Accessories Included:

N-scale Diamond Indenter 1/16" Ball Indenter

2- HRN test Blocks

3- HRT Test Block

Test Table 5.87" (150mm)

Flat Anvil 2.5" (63mm)

Std. V- Anvil

**Dust Cover** 

**Accessory Case** 

#### **Options:**

NIST/ASTM certified test blocks, penetrators and kits are available.

Please refer to pages 48-52.

**PLEASE CONTACT US** FOR DETAILS.

- Test resolution: 0.01HR Rockwell unit;
- Operation temperature: 50°- 95°F (10°~35°C)
- Power supply: single phase, AC, 110-220 with manual change, 50~60Hz, 4A;
- Machine dimension: 700mm×250mm×600mm.



### Load Cell, Closed Loop, Superficial Rockwell Hardness Tester!

#### 900-346

Just like our Phase II analog rockwell hardness tester, the the Phase II superficial rockwell hardness tester with digital indicator comprises the very best in "state of the art" design, coupled with dynamic precision only found at Phase II. Used for testing thin and soft metals in the superficial rockwell hardness scales, this tester is easy to operate yet engineered to obtain highly sensitive and accurate readings. The 900-345D will offer unmatched repeatability in all superficial rockwell scales. A perfect, rugged performer suited for almost any environment including heat treat facilities, tool rooms, workshops, laboratories and inspection labs. So test away with confidence and a level of accuracy you will only find at Phase II.



Touch Screen Functions w/One Touch Testing Feature!

### Direct Loading Method With Load-Cell Instead Of Dead Weight System. High Speed Test Cycle and Extremely Accurate Loading Control

- Automatic conversions to HB, HV, Regular Rockwell Scales
- Touch Screen selectable system
- Upper/Lower Limit Settings

1	• 1 • 1 • 1 • 1	1. 1. 1	
	Minor Load	10 Kgf	
	Major Load	60 Kgf, 100 Kgf, 150 KGF	
/	Test Force Application	Load Cell Closed Loop	
	Test Force Control	Motorized	
	Results Display	Hi Def LCD Digital Readout	
	Resolution	0.01HR	
	Vertical Capacity	7.80"	
V	Throat Depth	5.90"	
	Height	700mm	
	Width	600mm	
	Depth	250	
	Weight	220 lbs	

#### • Test resolution: 0.01HR Rockwell unit;

- Operation temperature: 50° 95°F (10°C~35°C)
- Ambient environment: clean, no vibration, no strong magnetic field, and no corrosive medium
- Power supply: single phase, AC, 110-220 with manual change, 50~60Hz, 4A;
- Machine dimension: 700mm×250mm×600mm.

#### **Options:**

NIST/ASTM certified test blocks, penetrators and kits are available.

Please refer to pages 48-52.

PLEASE CONTACT US FOR DETAILS.

#### Accessories Included:

C-scale Diamond Indenter

1/16" Ball Indenter

3- HRC test Blocks

1- HRB Test Block

1-HRA Test Block

Test Table 5.87" (150mm)

Flat Anvil 2.5" (63mm)

Std. V- Anvil

Dust Cover

Accessory Case

### Load Cell, Closed Loop, Superficial Rockwell Hardness Tester!

#### 900-367

This digital Rockwell hardness tester with fully automated load/unload procedures affords highly sensitive and accurate readings. Micro computer controlled Touch Screen with USB output to PC. The 900-367 digital Rockwell hardness tester offers programmable scale conversions, dwell times, statistical capabilities and test counter. Capable of testing in all of the regular Rockwell hardness scales.

## 28 Digital Rockwell Hardness Tester

#### 2 Key performance parameters

- Preload: 98.1N (10kgf)
- Total test force: 588.4N(60kgf), 980.7N(100kgf), 1471N(150kgf)
- Scales: HRA,HRB, HRC, HRD, HRE, HRF, HRG, HRH, HRK, HRE, HRL, HRM, HRP, HRR, HRS, HRV
- Load dwell duration: 2-50s
- Resolutio: 0.1HR
- Display: High definition backlight LCD
- Operation: Menu selectable push buttons
- Auxiliary functions: Upper/lower limits setting& alarm, Scale conversions: HV & HB
- Data output: USB memory stick
- Testing Capacity: Vertical: 8.00" Throat Depth: 7.87"
- Dimensions: Height: 22.04" Width: 8.07" Depth: 31.49" (560mm×205mm×800mm)
- Power supply: single phase, AC, 110V, 50-60Hz, 4A
- Gross weight: 175lbs (80kg)

#### Accessories Included:

- A. Large Anvil
- B. Small Diameter Anvil
- C. V-shaped Anvil
- D. Five Test Blocks
- 1. One each, HRA 70-85
- 2. One each, HRB 75-95
- 3. One each, HRC 25-35
- 4. One each, HRC 40-50
- 5. One each, HRC 55-65
- E. 120D Diamond Indentor
- F. 1/16" Carbide Ball indentor
- G. Storage BoxT

#### **Options:**

NIST/ASTM certified test blocks, penetrators and kits are available.

Please refer to pages 48-52.

PLEASE CONTACT US FOR DETAILS.

#### 900-410

II analog rockwell hardness tester, the the Phase II superficial rockwell hardness tester with digital indicator comprises the very best in "state of the art" design, coupled with dynamic precision only found at Phase II. Used for testing thin and soft metals in the superficial rockwell hardness scales, this tester is easy to operate yet engineered to obtain highly sensitive and accurate readings. The 900-345D will offer unmatched repeatability in all superficial rockwell scales. A perfect, rugged performer suited for almost any environment including heat treat facilities, tool rooms, workshops, laboratories and inspection labs. So test away with confidence and a level of accuracy you will only find at Phase II.



Cast Iron Body! w/Touch Screen Functions

Minor Load	10 Kgf
Major Load	60 Kgf, 100 Kgf, 150 KGF
Test Force Application	Load Cell Closed Loop
Test Force Control	Motorized
Results Display	Hi Def LCD Digital Readout
Resolution	0.01HR
Vertical Capacity	8.0"
Throat Depth	7.8"
Height	22"
Width	8"
Depth	31"
Weight	175 lbs

#### Options:

NIST/ASTM certified test blocks, penetrators and kits are available.

Please refer to pages 48-52.

PLEASE CONTACT US

FOR DETAILS.

#### **Accessories Included:**

C-scale Diamond Indenter 1/16" Ball Indenter

3- HRC test Blocks

1- HRB Test Block

1- HVD 1621 DIOC

1-HRA Test Block Test Table 5.87" (150mm)

Flat Anvil 2.5" (63mm)

Std. V- Anvil

Dust Cover

Accessory Case

• Test resolution: 0.01HR Rockwell unit;

• Operation temperature: 50° - 95°F (10°C~35°C)

• Ambient environment: clean, no vibration, no strong magnetic field, and no corrosive medium

Power supply: single phase, AC, 110-220 with manual change, 50~60Hz, 4A;

Direct Loading Method With Load-Cell Instead Of Dead Weight System. High Speed Test Cycle and Extremely Accurate Loading Control

- Automatic conversions to HB, HV, Regular Rockwell Scales
- Touch Screen selectable system
- Upper/Lower Limit Settings

### Load Cell, Closed Loop, Superficial Rockwell Hardness Tester!

#### 900-415

This digital Rockwell hardness tester with fully automated load/unload procedures affords highly sensitive and accurate readings. Micro computer controlled Touch Screen with USB output to flash drive. The 900-415 digital Rockwell hardness tester offers programmable scale conversions, dwell times, statistical capabilities and test counter. Capable of testing in all of the regular Rockwell hardness scales.

# Tall Frame Digital Superficial Rockwell Hardness Tester



#### Features:

- Fully automated load/unload procedures affords highly sensitive and accurate readings
- Micro computer controlled with USB output to built-in mini printer or PC.
- Offers programmable scale conversions, dwell times, statistical capabilities and test counter
- Capable of testing in all of the Superficial Rockwell® scales
- Automatic conversions to HRC, HRB, HB, HV, HLD and Ob
- Easily obtain Average, Min/Max, S, R
- Menu selectable system
- Upper/Lower Limit Settings
- Memory of 500 test results
- Curved Surface Auto correction



Minor Load	3Kgf
Major Load	15Kgf 30 Kgf 45 Kgf
Test Force Application	Dead Weight
Test Force Control	Motorized
Results Display	Hi Def LCD Digital
Vertical Capacity	16.5"
Throat Depth	6.50"
Height	28.34"
Width	7.87"
Depth	21.60"
Weight	330 lbs

#### **Options:**

 NIST/ASTM certified test blocks, penetrators and kits are available.
 Please refer to pages 48-52.

PLEASE CONTACT US
FOR DETAILS.

#### **Included Accessories:**

- N-scale Diamond Indentor
- 1/16" Steel Ball Indentor
- 3- HRN Test Blocks
- 3-HRT Test Blocks
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Std. Vee Anvil
- Accessory Case
- Dust Cover

#### **FOR TESTING VERY LARGE PARTS**

#### 900-349 Special Order Only

Fully automated load/unload procedures affords highly sensitive and accurate readings. Micro computer controlled with USB output to built-in mini printer. Offers programmable scale conversions, dwell times, statistical capabilities and test counter.

## Tall Frame Digital Motorized Rockwell 31 Hardness Tester

#### Features:

- Easily obtain Average, Min/Max, S, R
- Menu selectable system
- Upper/Lower Limit Settings
- Memory of 500 test results
- Curved Surface Auto Correction

#### **Included Accessories:**

- C-scale Diamond Indenter
- 1/16" Ball Indenter
- 3- HRC test Blocks
- 2- HRB Test BlockS
- 1PC HRA Test Block
- Built-in Mini Printer
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Std. Vee Anvil
- Accessory Case
- Dust Cover

Minor Load	10 Kgf
Major Load	60 kgf, 100 kgf, 150 kgf
Test Force Application	Dead Weight
Test Force Control	Motorized
Results Display	Hi Def LCD Digital Readout
Resolution	0.1HR
Memory/Output	500 Tests/USB
Vertical Capacity	16.5"
Throat Depth	6.50"
Height	28.34"
Width	7.87"
Depth	21.60"
Weight	330 lbs





phase

#### **Options:**

• NIST/ASTM certified test blocks, penetrators and kits are available. Please refer to pages 48-52. **PLEASE CONTACT US** 

FOR DETAILS.

Comes Complete with everything needed to test in the following Rockwell Scales; A, B, C, D, F, G. Rockwell Scales E, H, K, L, M, P, R, S, V can be achieved with optional indentors!

#### 900-366

This digital Rockwell hardness tester with fully automated load/unload procedures affords highly sensitive and accurate readings. Micro computer controlled with USB output to built-in mini printer. The 900-366 digital Rockwell hardness tester offers programmable scale conversions, dwell times, statistical capabilities and test counter. Capable of testing in all of the regular Rockwell® scales.

### 2 Tall Frame TWIN Rockwell Hardness Tester



#### Features:

#### 16.9" Vertical Capacity

- The protruding indenter design is ideal for testing inside diameters and recesses, often impossible with
  more traditional hardness testers. Inside diameters as small as 1-1/2-inches can be tested with the standard
  indenter. Operators can test close to vertical surfaces, to within 1/4-inch with the standard indenter. Testing
  is fast, accurate and there are fewer broken diamonds due to an outstanding viewing area.
- Wide measurement range: 30 rockwell hardness scales in total, HRA, HRB, HRC, HRD, HRE, HRF, HRG, HRH, HRK, HRL, HRM, HRP, HRR, HRS, HRV, HR15N, HR30N, HR45N, HR15T, HR30T, HR45T, HR15W, HR30W, HR45W, HR15X, HR30X, HR45X, HR15Y, HR30Y and HR45Y.
- Auxiliary functions: The 900-386 rockwell hardness tester is capable of upper and lower limit settings; data
  statistics, the computing for average value, standard deviation, maximum and minimum; scale conversion
  (the testing results can be converted into the values of HB, HV, HLD, HK and b (strength); curved surface
  correction will automatically correct the measuring results for cylindrical surface and spherical surface.

,	M.	
Minor Load	3Kgf	10Kgf
	15Kgf	60 Kgf
Major Load	30 Kgf	100 Kgf
	45 Kgf	150 Kgf
Test Force Application	Dead We	eight
Test Force Control	Motorize	d
Display	Hi-Def. Digital Readout	
Display Resolution	0.1HR	
Vertical Capacity	16.9 in.	
Throat Depth	7.8 in.	
Darrey Cramby	single pho	rse, AC, 110V/220V
Power Supply	(selectable	e)
Weight	285lbs N	let (Shipping weight= 350 lbs.)
Dimensions	730mm	x 400mm x1000mm

#### 900-386

The NEW! Phase II Tall Frame 900-386 twin hardness tester can be used directly to measure Rockwell and superficial Rockwell hardness and change those values of Rockwell hardness into HB, HV, HLD, HK and Đb values.

Loaded with features, the 900-386 rockwell hardness tester is capable of upper and lower limit settings; data statistics, the computing for average value, standard deviation, maximum and minimum; scale conversion (the testing results can be converted into the values of HB, HV, HLD, HK and Đb (strength) and curved surface correction. A perfect performer suited for any environment including heat treat facilities, tool rooms, workshops, laboratories and inspection labs.

# Digital Rockwell/Superficial Rockwell 33 Hardness Tester

Load Cell, Closed Loop, Rockwell Hardness Tester!

Touch Screen Functions w/One Touch Testing Feature!

	Minor Load	29.4N (3kgf), 98.1N (10kgf)
/·/····	Major Load	147.1N(15kgf), 294.3N(30kgf), 441.3N(45kgf), 588.4N (60kgf), 980.7N (100kgf), 1471N (150kgf)
1.	Test Force Application	Load Cell Closed Loop
k	Test Force Control	Motorized
	Results Display	Hi Def LCD Digital Readout
	Resolution	0.01HR
	Vertical Capacity	7.80"
	Throat Depth	5.90"
	Height	700mm
	Width	600mm
	Depth	250
	Weight	220 lbs
	Weight	220 lbs

#### Options:

 NIST/ASTM certified test blocks, penetrators and kits are available.
 Please refer to pages 48-52.

PLEASE CONTACT US FOR DETAILS.

- Test resolution: 0.01HR Rockwell unit;
- Operation temperature: 50°-95°F (10DCD35DC)
- Ambient environment: clean, no vibration, no strong magnetic field, and no corrosive medium;
- Power supply: single phase, AC, 110-220 with manual change, 50~60Hz, 4A;
- Machine dimension: 700mm×250mm×600mm.

Direct Loading Method With Load-Cell Instead Of Dead Weight System.

High Speed Test Cycle and Extremely Accurate Loading Control

Ascent of Load Shaft • Minor Load Application • Test Load Application/Hold/Release

Rockwell Hardness Display • Descent of Load Shaft

- Automatic conversions to HB, HV, Other Rockwell Scales
- Touch Screen selectable system
- Upper/Lower Limit Settings

#### Accessories Included:

- C-scale Diamond Indenter
- 1/16" Ball Indenter
- 2- HRC test Blocks
- 1- HRB Test Block
- 1-HRN Test Block
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Std. V- Anvil
- Dust Cover
- Accessory Case

#### 900-387

This digital Rockwell/Superficial Rockwell hardness tester with fully automated

load/unload procedures affords highly sensitive and accurate readings. Micro computer controlled Touch Screen with USB output to PC. The 900-387 digital Rockwell hardness tester offers programmable scale conversions, dwell times, statistical capabilities and test counter. Capable of testing in all of the regular Rockwell hardness scales

# 34 Fully Automatic Rockwell Hardness Tester

Auto Z Axis Load Cell!

#### Features:

- The test force is applied via a closed-loop control unit with a load cell, a DC motor and an electronic measurement and control unit replace traditional dead weights. The result is highly accurate measurements at all test loads up to 0.5%.
- Simple plug and play tech allows for much more quick and easy installation than traditional dead weight type machines.
- Automated Z-Axis .Just press START key once, entire test process will be finished automatically.
   regardless of the size of the sample, the position of the sample, the distance between the indenter and sample surface. The sample will be auto-lifted to approach the indenter and finish testing automatically.
- Higher precision than handle wheel lifting/dead weight type machines which can be affected by user interaction.
- Extended dolphin nose allows vertical test height of 11.8" and throat depth of 8.6".
- Built-in micro-printer.

#### **Basic Functions:**

- Twin tester–Regular Rockwell & Superficial Rockwell hardness for metal and plastic material.
- Horizontal dolphin nose Indenter is suitable also for internal and external testing.
- Testing on Surfaces difficult to reach. Testing internal surface of rings and tubes.
- Provided with many features such as high measuring precision, wide measuring range with 30 Rockwell scales.
- The tester is suitable for testing of carbon steel, alloy steel, cast iron, non-ferrous metal.
- Automatic testing cycle: Lifting of part, pre-loading, loading, dwell, unloading, results will be finished automatically.
- Measuring results digitally displayed and can be printed, or transmitted to external computer automatically via USB port.
- Test HR value can be converted to the value of HB, HV, HK and ob value.
- The tester meets the following standards: ISO 6508-2, ASTM E18

#### Options:

 NIST/ASTM certified test blocks, penetrators and kits are available.
 Please refer to pages 48-52.

PLEASE CONTACT US FOR DETAILS.

#### **Included Accessories:**

- Standard hardness block for A scale
- Standard hardness block for B scale
- Standard hardness block for C scale (3)
- Standard hardness block for 30N scale
- Standard hardness block for 30T scale
- Ball indenter (1/16")
- 120° cone diamond indenter

- Mounting screws for indenter (2)
- Flat anvil
- "V "shape anvil
- Power supply cord
- Screwdriver for indenter mounting
- Dust cover

#### Parameters:

- Preload: 29.4N (3kgf), 98.1N (10kgf)
- Total test forceĐ147.1N(15kgf), 294.3N(30kgf), 441.3N(45kgf), 588.4N (60kgf), 980.7N (100kgf), 1471N (150kgf)
- Scales: HR15N, HR30N, HR45N, HR15T, HR30T, HR45T, HR15W, HR30W, HR45W, HR15X, HR30X, HR45X, HR15Y, HR30Y, HR45Y, HRA, HRB, HRC, HRD, HRE, HRF, HRG, HRH, HRK, HRL, HRM, HRP, HRR, HRS, HRV
- Load dwell duration: 2-50s, can be set and stored
- Resolution: 0.1HR
- DisplayDHigh definition backlight LCD
- Operation DMenu selectable, Membrane keypad

- Upper/lower limits setting & alarming
- Data statistics: Avg., Max., Min., S, R
- Curved surface auto correction
- Memory: Max 400 items of test results stored automatically
- Testing CapacityD300mm (vertical) , 220mm (horizontal)
- Dimensions: 690mmx280mmx860mm
- Power supply: AC, 220V/110V, 50±60Hz, 4A (convertible)
- Net weight: 86 kg (190lbs)
- · Gross weight: 120kg (265 lbs)



900-388


## Fully Automatic Universal Hardness Tester

phaseII

### READS DIRECTLY IN ROCKWELL, SUPERFICIAL ROCKWELL, BRINELL AND VICKERS SCALES!

#### **Features**

- Universal Hardness Tester designed for metal and plastic materials
- Horizontal dolphin nose Indenter is suitable also for internal and external testing.
- Testing on Surfaces difficult to reach. Testing internal surface of rings and tubes.
- Provided with many features such as high measuring precision, wide measuring range with 30 Rockwell scales.
- The tester is suitable for testing of carbon steel, alloy steel, cast iron, non ferrous metal.
- Automatic testing cycle: Lifting of part, pre-loading, loading, dwell, unloading, results will be finished automatically.
- Measuring results digitally displayed and can be printed, or transmitted to external computer automatically via USB port.
- Test HR value can be converted to the value of HB, HV, HK and ob value.



VICKERS parameters			
Test Force 3kgf, 10kgf, 20kgf, 30kgf, 50kgf, 100kgf			
Indenter	136° diamond pyramid		
Scales HV3, HV10, HV20, HV30, HV50, HV100			

#### **Other Parameters:**

• Load dwell duration: 2~50s, can be set and stored

• Resolution: 0.1HR

Display: High definition backlight LCD
 Operation: Menu selectable, Membrane keypad
 Limit setting: Upper/lower limits setting & alarming

• Data statistics: Avg., Max., Min., S, R

Curved surface auto correction

Memory Max 400 items of test results stored automatically

• Testing Capacity: 300mm (vertical), 220mm (horizontal)

Dimensions: 690mm×280mm×860mm

Power supply: AC, 220V/110V, 50D60Hz, 4A (convertible)

Net weight: 86 kg (190lbs)
 Gross weight: 120kg (265 lbs)

#### 900-450

The test force is applied via a closed-loop control unit with a load cell, a DC motor and an electronic measurement and control unit that replace traditional dead weights. The result is highly accurate measurements at all test loads up to 0.5%. Simple plug and-play tech allows for much more quick and easy installation than traditional dead weight type machines. Automated Z-Axis .Just press START key once, entire test process will be finished automatically. regardless of the size of the sample, the position of the sample, the distance between the indenter and sample surface. The sample will be auto-lifted to approach the indenter and finish testing automatically. Higher precision than handle wheel lifting/dead weight type machines which can be affected by user interaction. Extended dolphin nose allows vertical test height of 11.8" and throat depth of 8.6". Built-in micro-printer.


## Digital Brinell Hardness Tester with Closed Loop, Load Cell Technology

#### Features:

- Load Cell driven system provides precise control of test force application
- Direct reading
- Engineered to obtain highly sensitive and accurate readings
- Perfect for laboratories, workshops, tool rooms, inspection labs, etc.
- Measuring Range: 8-650HBW

#### Included Accessories:

- Calibration block 125-350HBW10/3000
- Calibration block 125-350HBW10/1000
- 10mm Tungsten Carbide Ball indenter
- 5mm Tungsten Carbide Ball indenter
- 2.5mm Tungsten Carbide Ball indenter
- · Mounting screws for indenter
- Flat anvil
- "V "shape anvil
- 20X microscope
- **Dust cover**









Optional Accessory: HT-5000 Optical Brinell Scanne

**Specifications:** 

Loads: F3000kgf (29400N), 1500Kgf (14700N), 1000Kgf (9800N), 750Kgf(7355N),500Kgf (4900N),

250Kgf (2452N), 187.5Kgf (1839N), 125Kgf (1226N), 100Kgf (980N), 62.5Kgf(612.9N)

Load dwell duration: 2s-99s, can be set and stored **Tungsten Carbide Ball indenter:** 10mm, 5mm, 2.5mm

Measuring range: 8HBW-650HBW

Magnification of the microscope: 20X Resolution capability of the microscope: 0.005mm Max measurable height: 230 mm Max measurable depth: 140 mm

**Dimensions:** 530mm x 260mm x 750mm 220/110 V, 50/60 Hz, 4A **Power supply:** 

Weight: 224lbs.

#### **Options:**

• NIST/ASTM certified test blocks, penetrators and kits are available. Please refer to pages 50-52. **PLEASE CONTACT US** 

**FOR DETAILS.** 

#### 900-355

Innovative closed-loop technology. The tester incorporates the latest load cell technology. The test load is applied via a closed-loop control unit with a load cell, a DC motor and an electronic measurement and control unit. The result is highly accurate Brinell hardness measurements at all test loads up to 0.5%. The common load overshoot or undershoot as known from traditional dead weight, or open-loop, systems is eliminated. The absence of mechanical weights not only eliminates friction problems but also makes the equipment less sensitive to misalignments caused by vibrations.

## Tall Frame Digital Brinell Hardness Tester with Closed Loop, Load Cell Technology









Optional Accessory: PHT-5000 Optical Brinell Scanner See Page 41



#### 15.7" Vertical Capacity

- Test load selection by keypad and shown on the LCD screen
- Fully automatic test cycles. The Brinell hardness Tester features a fully automatic test cycle, load application, dwell, unloading, is performed fully automatically. This greatly improves reproducibility of test results since operator influence is eliminated.
- Selectable dwell times by screen. The indenter, load, and other test information are shown clearly on the large LCD screen.
- The directions for 0.102F/D2 ratios selecting according to the materials and hardness range can be shown on the screen.
- Equipped with a 20X optical microscope to measure the diameter of Brinell indention.
- Brinell Hardness Calculator(BHC) makes the hardness value calculation easy and convenient.

#### Options:

 NIST/ASTM certified test blocks, penetrators and kits are available. Please refer to pages 50-52. PLEASE CONTACT US FOR DETAILS.

#### **Included Accessories:**

- Calibration block 125-350HBW10/3000
- Calibration block 125-350HBW10/1000
- 10mm Tungsten Carbide Ball indenter
- 5mm Tungsten Carbide Ball indenter
- 2.5mm Tungsten Carbide Ball indenter
- · Mounting screws for indenter
- Flat anvil
- "V "shape anvil
- 20X microscope
- Dust cover

#### **Technical Specifications:**

Loads: 3000kgf (29400N), 1500Kgf (14700N), 1000Kgf (9800N), 750Kgf(7355N),500Kgf (4900N), 250Kgf (2452N), 187.5Kgf (1839N), 125Kgf (1226N),100Kgf (980N), 62.5Kgf(612.9N)

Load dwell duration: 2s~99s, can be set and stored Tungsten Carbide Ball Indenter: 10mm, 5mm, 2.5mm

Measuring Range: 3.18HBW~658HBW Magnification of the Microscope: 20X

Resolution capability of the Microscope: 0.005mm

**Accuracy of Brinell Hardness Value:** 

 Hardness Range(HBW)
 Error (%)
 Repeatability(%)

 ≤ 125
 ± 3.0
 ≤ 3.0

 125 < HBW ≤ 225</td>
 ± 2.5
 ≤ 2.5

 > 225
 ± 2.0
 ≤ 2 0

 Max measurable height: 430 mm (w/large anvil)
 450mm (w/small anvil)

Max measurable depth: 200mm

Dimensions: 600mm×300mm×1000mm

Power supply: 220/110 V, 50/60 Hz, 4A (Convertible)

Weight: 205kg (gross) 165kg(net)

#### 900-356

Innovative closed-loop technology. The tester incorporates the latest load cell technology. The test load is applied via a closed-bloop control unit with a load cell, a DC motor and an electronic measurement and control unit. The result is highly accurate Brinell hardness measurements at all test loads up to 0.5%. The common load overshoot or undershoot as known from traditional dead weight, or open-loop, systems is eliminated. The absence of mechanical weights not only eliminates friction problems but also makes the equipment less sensitive to misalignments caused by vibrations.

# Touch Screen! Digital Brinell Hardness Tester



3-Indentors
2.5mm, 5mm, 10mm
2-Objectives
20x, 40x
Covers all loads from
62.5kgf up to 3000kgf

#### Features:

- Load Cell driven system provides precise control of test force application
- Direct Touch Screen Controls
- 3 Indentors and 2 Objectives covering all common Brinell scales
- Engineered to obtain highly sensitive and accurate readings
- Perfect for laboratories, workshops, tool rooms, inspection labs, etc.
- Measuring Range: 8-650HBW

## Auto Z-Axis! Auto Load/Unload!

Touch Screen Monitor! • Instant Brinell Readings!

No Manual Scope Needed! • No Conversion Charts Needed!

#### Technical Data:

#### -Test force is selectable

612.9N(62.5kgf) 4903N(500kgf) 980.7N(100kgf) 7355N(750kgf) 1226N(125kgf) 9807N(1000kgf) 1839N(187.5kgf) 14710N(1500kgf) 2452N(250kgf) 29420N(3000kgf)

Test Range 3.18~653HBW

Loading Method Automatic (Loading/Dwell/Unloading)

Hardness Reading Indentation Displaying and Automatic Measuring on Touch

Screen

#### Computer

-CPU: Intel 13 -Memory: 2G -SSD: 32G

Conversion Scale HV, HK, HRA, HRB, HRC, HRD, HRE, HRF, HRG, HRK, HR15N,

HR30N, HR45N, HR15T, HR30T, HR45T, HS, HBS, HBW

 Data Output
 USB Port, VGA Interface, Network Interface

 Turret Control
 Automatic Recognition and Shifting

(Three Indenters, Two Objectives)

Objective 1×, 2× Total Magnification 20×, 40×

Resolution 1.25µm - 0.625µm

 Dwell Time
 0~95s

 Max. Height of Specimen
 260mm

 Throat
 150mm

 Power Supply
 AC220V, 50Hz

**Standard** ISO 6506, ASTM E10-12, JIS Z2243, GB/T 231.2

**Dimension** 600×330×890mm, Packing Dimension: 820×460×1170mm

Weight Net Weight: 150kg, Gross Weight: 180kg

#### 900-357 Special Order Only

Innovative closed-loop technology. The brinell hardness tester incorporates the latest load cell technology. The test load is applied via a closed-loop control unit with a load cell, a DC motor and an electronic measurement and control unit. The result is highly accurate Brinell hardness tester measurements at all test loads up to 0.5%. The common load overshoot or undershoot as known from traditional dead weight, or open-loop, systems is eliminated. The absence of mechanical weights not only eliminates friction problems but also makes the equipment less sensitive to misalignments caused by vibrations.

The 900-357 brinell hardness tester combines a touch screen computer and brinell hardness tester in one complete Brinell hardness testing package. All the required parameters can be selected on the panel computer. It's clear display and touch screen make it easy to use and eliminates user error. The clear video screen using it's CCD interface will directly display the dynamic indentation image, lock the image and automatically measure the Brinell hardness. The operator can choose the selectable conversion values among the hardness scales, save the results of each measurement and generate the image report. The load of test forces is accomplished using state of the art load cell system combined with precision mechanical drive.




#### 900-358


Innovative closed-loop technology. The tester incorporates the latest load cell technology. The test load is applied via a closed-loop control unit with a load cell, a DC motor and an electronic measurement and control unit. The result is highly accurate Brinell hardness measurements at all test loads up to 0.5%. The common load overshoot or undershoot as known from traditional dead weight, or open-loop, systems is eliminated. The absence of mechanical weights not only eliminates friction problems but also makes the equipment less sensitive to misalignments caused by vibrations.

# 40 Automatic Brinell Hardness Tester w/Auto Z Axis!



- Fully automated test cycles. Press the START key once, the hardness tester will complete the entire test cycle automatically—1)sample elevation 2)major load application 3)Dwell Time 4) Unloading.
- Equipped with CCD camera and built-in touch screen PC performs the indentation measuring process automatically.
- Measurement software includes useful functions.
  - a) Single and batch testing mode
  - b) Tolerance setting w/alarm
  - c) Statistic values such as Max, Min, Avg, R and S are selectable
  - d) Convert test result to other scales, such as HRC,HRB,HRA,HV,Db.
- All test results and indention images are saved automatically
- Test report created in Microsoft EXCEL format, can be edited, copied or printed.
- Load Cell driven system provides precise control of test force application
- Direct digital reading
- Engineered to obtain highly sensitive and accurate readings
- · Perfect for laboratories, workshops, tool rooms, inspection labs, etc.
- Measuring Range: 8-650HBW





Loads: 3000kgf (29400N), 1500Kgf (14700N), 1000Kgf (9800N), 750Kgf(7355N),500Kgf (4900N), 250Kgf (2452N), 187.5Kgf (1839N), 125Kgf (1226N),100Kgf (980N), 62.5Kgf(612.9N)

**Phase II** 

Load dwell duration: 2s~99s, can be set and stored Tungsten Carbide Ball Indenter: : 10mm, 5mm, 2.5mm

Measuring Range: 3.18HBW~58HBW Accuracy of Brinell Hardness Value:

Hardness Range(HBW)	Error (%)	Repeatability(%)
≤ 125	± 3.0	≤ 3.0
125 < HBW ≤ 225	± 2.5	≤ 2.5
> 225	± 2.0	≤ 2 0

Max measurable height: 230 mm Max measurable depth: 140 mm Dimensions: 530mm×260mm×1000mm Power supply: 220/110 V, 50/60 Hz, 4A

Weight: 110kg

#### 900-359

Innovative closed-loop technology. The tester incorporates the latest load cell technology. The test load is applied via a closed-loop control unit with a load cell, a DC motor and an electronic measurement and control unit. The result is highly accurate Brinell hardness measurements at all test loads up to 0.5%. The common load overshoot or undershoot as known from traditional dead weight, or open-loop, systems is eliminated. The absence of mechanical weights not only eliminates friction problems but also makes the equipment less sensitive to misalignments caused by vibrations.

## Optical Brinell Reader 41



- Increase Accuracy!
- Eliminate user measurement errors!
- Fast and easy measurements!

#### Laptop Not Included

#### Features

- Automatic scanning system for brinell impressions
- Friendly User Interface: Automatic measurement with a key stroke or a click of a buttonDTest results can be manually generated or corrected with a single mouse drag move
- High reliability: Advanced image processing and analysis technologies in automatic measurement. Field proven under severe sample surface conditions;
- Single camera with four magnifications: 1.3M pixel CMOS USB camera
  with two camera tubes with each tube height having two magnifications.
   Full measurement range is covered with four magnifications for better
  measurement accuracy. Specifically, tube 1 magnification #1 is suitable
  for indentation diameters 3-6mm, magnification #2 for 0.8-1.6mm,
  while tube 2 magnification #3 for 2-4mm, and magnification #4 for
  1-2mm.

#### **PHT-5000**

Includes the basic functions of an imaging system such as image capture, camera calibration, image processing, geometric measurement, document labeling, and album management; automatically or manually measures the indentation diameter and calculates the hardness HB value; HB2 (DIN 1605 standard) automatic measurement: Automatically or manually measures the indentation diameters on the calibration sample and the test sample, and automatically interpolates the HB value for the test sample; Converts HB to other hardness scales—Validates the test results with sample dimensions; automatically updates the statistical values such as average, min and max, standard deviation, Cp and Cpk; Auto-alarm: Automatically marks the out of spec measurements; Test report: Automatically generates customizable WORD or EXCEL report.

# 42 Micro Vickers Hardness Tester with Video Cam, Adapter & Software

Specifications: Testing Range:

1HV-2967H

Test Force:

0.098N(10g), .246N(25g), .49N(50g), 0.98N(100g) 1.96N(200g), 4.90N(500g),

9.80N(1000g)

7.00M

Max Height of the Specimen:

Max Distance from the

Indenter Center to the Instrument Panel:

Lens/indenters with: Carriage Control: 95mm

With Hand Turret

Automatic (loading/holding-up of the load/

unloading) 100x, 400x

Amplification of the microscope:

Dwell Time of the Test Force:

Min.Graduation Value of the Testing Drum Wheel: Dimension of the XY Table:

Movement Field of the XY Table: Light source/Power Supply:


Weight/Gross Weight:
Package Dimensions:

0.25µm 100x100mm 25x25mm

(5-60)\$

110/220V,60/50Hz/Cold Light Source

92lbs/77lbs 425x245x490mm

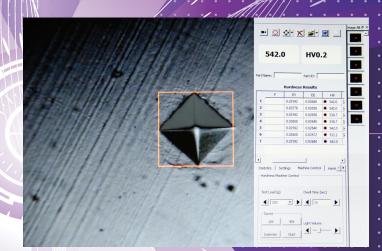



## 900-390A-Includes Video Cam, Adapter and Manual Measurement Software 900-390B-Includes Video Cam, Adapter and Auto-Measurement Software

This Micro Vickers hardness tester is a precise testing system suitable for hardness analysis of metallic specimens in metallography laboratories or production environments.

Software for 900-390A can be upgraded to 900-390B. Contact Phase II for further information

# Micro Vickers Hardness Tester with Auto 43 Turret with Video Cam, Adapter & Software



Packages A, B & C can be upgraded at any time.

Packages C&D only function with Phase II brand or similar machines.

Contact Phase II for further information.

**Technical Features:** 

Testing Range: 1HV-2967H\

Test Force: 0.098N(10g), .246N(25g), .49N(50g), 0.98N(100g)

1.96N(200g), 4.90N(500g), 9.80N(1000g)

Max Height of the Specimen:

Max Distance from the

.al. 05.....

Indenter Center to the Instrument Panel:

With Hand Turret

Lens/indenters with:

Automatic

Carriage Control:

(loading/holding-up of the load/unloading)

Amplification of the microscope:

100x, 400x

Dwell Time of the Test Force: Min.Graduation Value of (5-60)S

the Testing Drum Wheel:

0.25um

Dimension of the XY Table:
Movement Field of the XY Table:

100x100mm 25x25mm

Light source/Power Supply:

110/220V,60/50Hz/Cold Light Source

Weight/Gross Weight:92lbs/77lbsPackage Dimensions:425x245x490mm

This Micro Vickers hardness tester is a precise testing system suitable for hardness analysis of metallic specimens in metallography laboratories or production environments.

#### Model No. 900-391A

Includes Video cam, adapter and manual measurement software

#### Model No. 900-391B

Includes Video cam, adapter and Auto-Measurement software

#### Model No. 900-391C

Includes Video cam, adapter and Turret control w/manual measurement software

#### Model No. 900-391D

Includes Video cam, adapter and Turret control w/ Auto-Measurement software

#### Model No. 900-391E

Includes Video cam, adapter, Automatic X & Y axis control, and auto Turret control w/ Auto-Measurement software

#### Model No. 900-391F

Includes Video cam, adapter, Automatic X, Y & Z  $\,$  axis control, and auto Turret control w/ Auto-Measurement software

## 44 Micro Vickers Hardness Tester

Dual Penetrators!
Knoop & Vickers

3 Measuring Objectives! 10x, 20x,40x

- The Max. Height of the specimen: 90 mm
- The Max. Depth of the specimen: 12t0 mm (From the center)
- Power supply: AC110/220V, 60/50Hz
- Overall dimension (L x W x H): 495×305×550mm
- · Weight: 33kg net

#### Specifications:

1. Test Forces: (gf) and (mN)

10, 25, 50,100, 200, 300, 500, 1000(1K) gf 98, 245, 490, 980, 1960, 2940, 4900, 9800 **Nm** 

2. Test Scales:

Vickers Scales: HV0.01, HV0.025, HV0.05, HV0.1, HV0.2, HV0.3, HV0.5, HV1

**Knoop Scales:** HK0.01, HK0.025, HK0.05, HK0.1, HK0.2, HK0.3, HK0.5, HK1

3. Test mode: HV / HK

4. Language: English / Chinese

- 5. Test force application: Automatic lifting system
- 6. X-Y Testing Table

a) Dimension: 100×100mm

b) Travel: 25×25 mm

c) Revolving power: 0.002mm

- 7. Selection of hardness scale conversions
- 8. Dwell time of the test force: 0~90s (5 sec increments)
- 9. Turrett: Toggle between indenters and objectives:
  Automatic recognition and manual
- 10. Brightness: adjustable

#### 900-392A Vickers Hardness Tester

Includes Video cam, adapter and manual measurement software

#### 900-392B Vickers Hardness Tester

Includes Video cam, adapter and Auto-Measurement software

#### 900-392C Vickers Hardness Tester

Includes Video cam, adapter and Turret control w/manual measurement software

#### 900-392D Vickers Hardness Tester

Includes Video cam, adapter and Turret control w/ Auto-Measurement software

#### 900-392E Vickers Hardness Tester

Includes Video cam, adapter, Automatic X & Y axis control, and auto Turret control w/ Auto-Measurement software

#### 900-392F Vickers Hardness Tester

Includes Video cam, adapter, Automatic X, Y & Z axis control, and auto Turret control w/ Auto-Measurement software



#### Features


- 3 Measuring Objectives! 10x 20x 40x
- Dual Indentors! Vickers and Knoop
- Includes Auto-Turrett, Video Cam, and Measurement software
- Instant hardness scale conversions via supplied measurement software
- Measurement software allows you to save the measuring data, pictures of indent, generate the hardness-depth curve and save as WORD or EXCEL document.

#### Three measuring objectives to choose from:

Eyepiece	Objective	Total Amplification	Min. Test Unit
	10*	100*	.25 µm
10*	20*	200*	0.03 µm
	40*	400*	0.015 µm

# Digital Macro Vickers Hardness 45 Tester w/ built-in Printer





#### Main Accessories:

- Large test table
- "V"Shape test table
- 10X Digital Micro Lens
- Level
- Adjustable Screw
- Vicker Hardness Block
- RS232 Interface



**Carriage Control:** 

**Amplification of the Microscope:** 

est Forces: 9.807, 19.61, 24.52, 29.42, 49.03, 98.07,

196.1, 249.2, 490.3 N

1, 2, 2.5, 3, 5, 10, 20, 30, 50kgf

(Load/Dwell/Unload)

100x 200x

**Dwell Time of the Test Force:** (0-60)s

Min. Graduation Value of the Testing Drum Wheel: 0.125µm

Testing Field: 1HV—2967HV

Output: Built-in Mini Printer RS-232

Max. height of the specimen: 170 mm

Max. width of the specimen: 130 mm

Objective: 10x 20 x 40x selectable

Light source: Cold light source

**Power Supply:** 110V/220V,60/50Hz

**Dimension:** 535X225X580mm

Weight: 60 kg

#### Model No. 900-398A-Includes Video Cam, Adapter and Manual Measurement Software

#### Model No. 900-398B-Includes Video Cam, Adapter and Auto-Measurement Software

Our advanced line of Macro Vickers hardness testers are state-of-the-art, precise testing systems suitable for hardness analysis of metallic specimens in metallography laboratories or production environments.

The Phase II macro-vickers hardness testers are versatile and user-friendly systems.

Designed for the accurate hardness testing of small precision parts, thin materials, case hardened layers and all sorts of steel components. The Phase II 900-398 is our macro-vickers hardness tester, covering the load range from 1kg to 50kg, with digital technology. Conforming to ASTM E-384/92 vickers hardness testers standards, the 900-398 digital vickers hardness tester will offer unmatched repeatability. A perfect rugged performer suited for any environment, the Phase II vickers hardness testers are offered with a 5 year warranty and free lifetime technical support.

The 900-398 Vickers Hardness Tester is engineered to produce a clear indentation and a more precise measurement. By means of a load cell, closed circuit system for control, the CPU controls testing force to load/dwell/unload, allowing for the highest degree of accuracy. The large LCD shows the measuring methods, the testing force, the indentation length, hardness value, the dwell time of the testing force as well as the number of the measurement on its screen.

All information such as diagonal lines length of indentation, hardness values, data statistics and hardness conversions can be displayed on the LCD.

The tester can be adapted with a ccd camera for operation and data control via pc.

# Touch Screen! Macro Vickers Hardness Tester

- The Max. Height of the specimen: 185 mm
- The Max. Depth of the specimen: 130 mm (From the center)
- Power supply: AC110/220V, 60/50Hz
- Overall dimension (L x W x H): 560 x 335 x 675 mm
- Weight: 65kg

#### Features:

- With three measuring objectives, automatic recognition and shifting between the objective and the indenter, automatically get the Vickers or Knoop hardness value.
- Instant hardness scale conversions.
- With several USB and RS232 interfaces, the hardness measurement can be printed out by USB interface (equipped with an external printer).
- It can automatically save the measuring data, generate the hardnessdepth curve and save as WORD or EXCEL document.
- With X-Y automatic test table, automatic focusing and automatic measuring, it realizes the fully automation of Vickers hardness testing.

#### Technical Parameters:

- 1. Test Force
  - 9.807, 19.61, 24.52, 29.42, 49.03, 98.07, 196.1, 294.2, 490.3N, (1, 2, 2.5, 3, 5, 10, 20, 30, 50kgf)
- 2. Test mode: HV / HK
- 3. Language: English / Chinese
- 4. Test force application: Automatic lifting system
- 5. X-Y Testing Table
  - a) Automatic focusing
  - b) Dimension: 100 x 100mm
  - c) Travel: 50 x 50 mm
  - d) Revolving power: 0.002mm
- 6. Selection of hardness scale conversions
- 7. Dwell time of the test force: 0~60s (5 seconds as a unit)
- 8. Shifting method between indenter and objectives: Automatic recognition and manual
- 9. Brightness of the light source: adjustable
- 10. Digital camera pixel: 1.3 million
- 11. Optical system:




#### Three measuring objectives to choose from:

Eyepiece	Objective	Total Amplification	Min. Test Unit
	10*	100*	.25 µm
10*	20*	200*	.125 µm
	40*	400*	0.0625 µm

#### 900-399 Special Order Only

All the testing parameters can be selected on the side panel computer. Using touch screen, it operates quickly and conveniently and displays clearly and intuitively. With CCD image acquisition system, it shows the image clearly and gets the hardness value just by touching the screen.

# Measurement Software Packages 47 for Vickers Hardness Testers

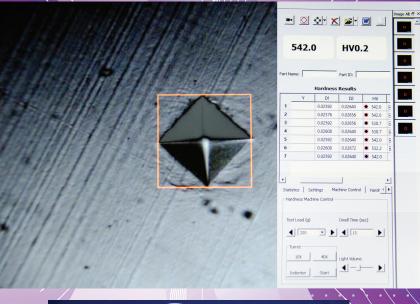



Packages A, B & C can be upgraded at any time.

Packages C&D only function with Phase II brand or similar machines.

Contact Phase II for further information.

Model No. 900391-ASOFT: Includes video cam, adapter and manual measure software

Model No. 900391-BSOFT: Includes Video cam, Adapter and Auto-measure software

Model No. 900391-CSOFT: Includes Video cam, Adapter and Turret Control w/ manual measure software

Model No. 900391-DSOFT: Includes Video cam, Adapter and Turret Control w/ Auto-measure software

Model No. 900391-ESOFT: Includes Video cam, adapter, Automatic X & Y axis control, and auto Turret

control w/ Auto-Measurement software

**Model No. 900391-FSOFT:** Includes Video cam, adapter, Automatic X, Y & Z axis control, and auto Turret control w/ Auto-Measurement software

The new Phase II measurement software packages include a high quality video cam and adaptor coupled with our extensive yet simple to use software. This combination can turn any manually operated micro vickers hardness tester into a world class measurement system that includes memory and USB output to a Word or Excel formatted file.

## 48 Vickers Accessories 2016



Thin Specimen Fixture Part No. 900390-010

- Range: 0.1 6mm
- Diameter(Bottom): 76mm
- Height: 43mm



Vertical Holding Fixture Part No. 900390-020

- Range: 0.6 4mm
- Diameter(Bottom): 60mm
- Height: 50mm



Clamping Fixture Part No. 900390-030

- Max Opening: 45mm
- L-80 x W-76 x H-13.5mm



X-Y Stage w/Micrometers Part No. 900390-050

- Graduation: 25mm x 25mm
- Table Size: 100 x 100 x 36mm



## Diamond Indenters Part No. 900390-0100 Micro Vickers


Part No. 900390-0150 Knoop Made in USA-Certified Part No. 900390-0100C Micro Vickers

Part No. 900390-0150C Knoop



#### Digital Micrometer Heads for X-Y Part No. 900390-052





Motorized X-Y Stage w/Controller and Measurement Software
Includes Video cam, Adapter and Turret Control w/ Auto- measure software

Part No. 900391-ESOFT

## Hardness Tester Stand/Cabinet 49



#### 900331-STAND

The Phase II hardness tester floor stand is a sturdy, heavy metal cabinet for securing your Rockwell, Brinell or Vickers hardness tester. The floor stand is supplied with adjustable feet, one drawer for storage of smaller parts and a large storage area for special fixtures. It is pre- drilled for an elevating screw.

The cabinets are approximately 18" wide by 23" deep by 27" high.

The Phase II stand will fit all Phase II brand hardness testers as well as many other name brand machines SHIPPING WEIGHT: 103LBS

## 50 Rockwell Hardness Tester Blocks

## 3pc NIST certified test block kit Part No. 900330-9410

3pc set includes HRC blocks w/NIST certification for each block in custom carry case

## NIST Master Calibration Kit-C scale Part No. 900330-9410M

Kit includes same HRC test blocks as above as well as a certified diamond indentor in custom carry case

## NIST Master Calibration Kit-C/N scale Part No. 900330-9410Z

Kit includes same test blocks as above as well as a certified Combo C&N scale diamond indentor in custom carry case



#### Features:

- Phase II offers a vast array of different hardness test blocks for Rockwell, Brinell and Vickers scales, as well as Portable hardness testers
- Phase II hardness test blocks are made of high grade materials to assure unmatched accuracy and repeatability throughout the entire block.
- Phase II Hardness test block surfaces are precision ground and lapped to an average finish of less than 2uin.
- Hardness Test blocks always engineered to obtain highly sensitive and accurate readings.
- All Made in the USA hardness test blocks conform to current ASTM specifications
- Traceability to NIST is offered on HRC steel blocks only.
- Prestigious Accredited laboratory A2LA and NVLAP in the USA used.

S	Ī	Ē	Ē	l

Part No.	Description	Shape	Range	Comments
900330-9413	Rockwell A	Round	80-88	Phase II std.
900330-9414H	Rockwell B	Square	85-100	Made in USA
900330-9414L	Rockwell B	Square	60-80	Made in USA
900330-9414C	Rockwell B	Round	85-100	Phase II std.
900330-9414D	Rockwell B	Round	60-80	Phase II std.
900330-9415C	Rockwell C	Round	20-30's	Phase II std.
900330-9415D	Rockwell C	Round	20-30's	Phase II NIST certified
900330-9415E	Rockwell C	Square	20-30's	Made in USA/NIST cert.
900330-9416C	Rockwell C	Round	40's-50's	Phase II std.
900330-9416D	Rockwell C	Round	40's-50's	Phase II NIST certified
900330-9416E	Rockwell C	Square	40's-50's	Made in USA/NIST cert.
900330-9417C	Rockwell C	Round	60-70	Phase II std.
900330-9417D	Rockwell C	Round	60-70	Phase II NIST certified
900330-9417E	Rockwell C	Square	60-70	Made in USA/NIST cert.
900340-9001	Superficial HR15N	Round	70-91	Phase II std.
900340-9002	Superficial HR30N	Round	42-80	Phase II std.
900340-9003	Superficial HR45N	Round	20-70	Phase II std.
900340-9004	Superficial HR45T	Round	55-72	Phase II std.
900340-9005	Superficial HR30T	Round	43-82	Phase II std.
900340-9006	Superficial HR15T	Round	73-93	Phase II std.
900345-1015N-L	Superficial HR15N	Square	Low range	Made in USA
900345-1015N-M	Superficial HR15N	Square	Mid range	Made in USA
900345-1015N-H	Superficial HR15N	Square	High range	Made in USA
900345-1015T-L	Superficial HR15T	Square	Low range	Made in USA
900345-1015T-M	Superficial HR15T	Square	Mid range	Made in USA
900345-1015T-H	Superficial HR15T	Square	High range	Made in USA
900345-1030N-L	Superficial HR30N	Square	Low range	Made in USA
900345-1030N-M	Superficial HR30N	Square	Mid range	Made in USA
900345-1030N-H	Superficial HR30N	Square	High range	Made in USA
900345-1030T-L	Superficial HR30T	Square	Low range	Made in USA
900345-1030T-M	Superficial HR30T	Square	Mid range	Made in USA
900345-1030T-H	Superficial HR30T	Square	High range	Made in USA
900345-1045N-L	Superficial HR45N	Square	Low range	Made in USA
900345-1045N-M	Superficial HR45N	Square	Mid range	Made in USA
900345-1045N-H	Superficial HR45N	Square	High range	Made in USA
900345-1045T-L	Superficial HR45T	Square	Low range	Made in USA
900345-1045T-M	Superficial HR45T	Square	Mid range	Made in USA
900345-1045T-H	Superficial HR45T	Square	High range	Made in USA

# Rockwell, Brinell, Vickers 51 and LEEB Test Blocks



#### ROCKWELL B – ALUMINUM

Part No.	Description	Shape	Range	Comments	
900330-9414AH	Rockwell B	Square	80's	Made in USA	
900330-9414AL	Rockwell B	Square	50's	Made in USA	
900330-9418H	Rockwell E	Square	90's	Made in USA	
900330-9418L	Rockwell E	Square	60's	Made in USA	

All of our Made in USA Brinell Test Blocks come certified to applicable standards. We adhere to a strict procedure for the calibration of these blocks, and the accuracy of the tester is maintained using a proving ring and load cell both traceable to N.I.S.T. The readings themselves are done using a stage micrometer also calibrated and traceable to N.I.S.T.

BRINELL					
Part No.	Description	Shape	Range	Comments	
900355-3000/150	3000kg Steel	Round	150-250	Phase II std.	
900355-3000/250	3000kg Steel	Round	250-500	Phase II std.	
900355-3030	3000kg Steel	Rectangle	100-200	Made in USA	
900355-3040	3000kg Steel	Rectangle	250-350	Made in USA	
900355-3050	3000kg/steel	Rectangle	350-500	Made in USA	
900355-3060	3000kg/steel	Rectangle	500-600	Made in USA	
900355-3010	3000kg	Rectangle	Low	Aluminum (USA)	
900355-3020	3000kg	Rectangle	High	Aluminum (USA)	

ROCKWELL B – BRASS					
Part No.	Description	Shape	Range	Comments	
900330-9414BH	Rockwell B	Square	<b>80</b> 's	Made in USA	
900330-9414BL	Rockwell B	Square	50's	Made in USA	


VICKERS HARDNESS TEST BLOCKS					
Part No.	Description	Range	Comments		
900390-V010	Vickers (1 gram to 1,000 gram)	All	Made in USA		
900390-V020	Heavy Load Vickers (1 Kg to 50 Kg)	All	Made in USA		
900390-K010	Knoop (1 gram to 1,000 gram)	All	Made in USA		

LEEB TEST BLOCKS						
Part No.	Description	Range	Comments			
PHT1300-01	Test Block for Leeb "D" (high HRC scale)	750-800	Phase II std.			
PHT130001-CERT	NIST Certified Test Block for Leeb "D" (high scale HRC)	750-800	Phase II std.			
PHT1300-02	Test Block for Leeb "D" (Mid Scale HRC)	590-670	Phase II std.			
PHT130002-CERT	NIST Certified Leeb "D" Block (Mid Scale HRC)	590-670	Phase II std.			
PHT1300-03	Test Block for Leeb "D" (low scale HRC)	490-570	NIST Certified			
PHT130003-CERT	NIST certified Leeb "D" Block (Low scale HRC)	490-570	For use with "G" impact devices			
PHT1100G-01	Leeb Test Block for "G" impact device	590-670				
PHT1100G-CERT	ASTM Certified G Block for Brinell Scale	590-670				
PHT1300-05	Double Sided Leeb "D" Test Block	750-800				

## 62 Hardness Tester Penetrators & Anvils

NIST Vickers and Knoop Diamonds Available on Request

#### PENETRATORS: DIAMOND

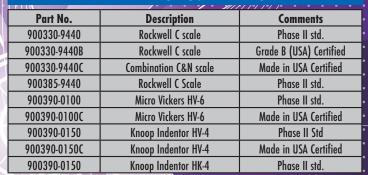



NIST Vickers and Knoop Diamonds Available on Request

#### PENETRATORS: W/CARBIDE BALL

	• /• • /• •/ •	/ 1.	[1311341]
	Part No.	Description	Comments
	900330-9441	1/16" Carbide Ball	Phase II std.
	900330-9441C	1/16" Carbide Ball	Certified (USA)
	900330-18	1/8" Carbide Ball	Phase II std.
	900330-18C	1/8" Carbide Ball	Certified (USA)
1	900330-14	1/4" Carbide Ball	Phase II std.
	900330-14C	1/4" Carbide Ball	Certified (USA)
	900330-12	1/2" Carbide Ball	Phase II std.
ı	900330-12C	1/2" Carbide Ball	Certified (USA)
ı	900355-010	Brinell 10mm Carbide Ball	Phase II std.
ı	900355-010C	Brinell 10mm Carbide Ball	Certified (USA)
ı	900355-050	Brinell 5mm Carbide Ball	Phase II std.
ı	900355-050C	Brinell 5mm Carbide Ball	Certified (USA)
	900355-025	Brinell 2.5mm Carbide Ball	Phase II std.
	900355-025C	Brinell 2.5mm Carbide Ball	Certified (USA)







#### **ANVILS: 20MM SHANK**

ı	Part No.	Description
	900375-9405	2" Dia. Anvil (flat)
	900375-9411	Large Dia. Anvil (Flat)
	900375-9412	V-Anvil
	900375-9406	½" Spot Anvil



Part No.	Description
900331-9405	2" Dia. Anvil (flat)
900365-9406	Spot Anvil (10mm)
900365-9411	Large Dia. Anvil (Flat)
900365-9412	V-Anvil
900365-9413	X-Large Round Anvil (230mm)
900365-625	Combo Spot V / Spot Anvil
900365-630	Diamond Spot Anvil
900365-700	Goose neck for inner surface testing



## Digital Shore Durometers 53











#### Shore A scale is for testing the following materials:

Rubber: Soft vulcanized (ie. tire), natural nitrile.

Elastic materials (rubber & rubber like): GR-S, GR-1, neoprene, thiokol.

Other: Wax, felt, leather etc. (materials that normally yield under fingernail pressure, such as the heel on your shoe).

#### Shore D scale is for testing the following materials:

Rubber: Hard

**Plastics:** Harder grades such as rigid thermoplastics, plexiglass, thermopolystyrene, vinyl sheet, cellulode acetate, thermosetting laminates (ie. formica)

Other: Paper filled calendar rolls, calendar bowls, etc. (materials that would not normally indent under fingernail pressure, such as a pocket comb or bowling ball).





#### **Specifications:**

- Measuring range: 0-100HSA (0-100 HSD)
- · Resolution: 0.5H
- Digital read out
- Auto Hold feature
- Uses 1-SR44 Button Cell Battery
- Custom rugged carry case

#### Model No. PHT-960 Shore A Scale

#### Model No. PHT-980 Shore D Scale

Designed to test the hardness of Rubbers and Plastics

These sleek hand held hardness testers are crafted and engineered to perform at the highest level of accuracy. An ergonomic, lightweight design assists in taking precise and consistent hardness measurements.

## 54 Digital Shore Durometers





	PHT-950 Shore "A"	PHT-975 Shore "D"	
Measurement Range	0-100HSA	0-100 HSD	
Resolution	0.1H	0.1H	
Digital Readout	Yes	Yes	
Statistics	Yes Mean, Min, Max, No. of Measurements and Deviation	Yes Mean, Min, Max, No. of Measurements and Deviation	
Power Supply	4 x AAA	4 x AAA	
Low Battery Indicator	Yes	Yes	

Test Blocks Not Included. See selection below:

PHT-950 Digital Shore A Durometer			
PHT-975	Digital Shore D Durometer		
PHT950-25	7pc Test Block Kit A (USA)		
PHT950-20	7pc Test Block Kit A (import)		
PHT975-25	3pc Test Block Kit D (USA)		
PHT975-20	3pc Test Block Kit D (import)		

These testers are crafted and engineered to perform at the highest level of accuracy. An ergonomic and attractive design combined with lightweight assists in taking precise hardness measurements.





## Accessories for Shore Durometers 55 Shore A & D Scale Test Block Kits





- Consists of 7 color coded test blocks that range from Ha 30's to Ha 90's.
- Designed for periodic verification of calibration accuracy.
- For use with all Shore A durometers
- Test kit is serialized for easy traceability
- Durometer results should be within +/-2 Durometer Points of stated test block value.



PHT975-25 3pc Shore D Test Block Kit (USA) PHT975-20 3pc Shore D Test Block Kit (Import)

- Consists of 7 color coded test blocks that range from Ha 30's to Ha 90's.
- Designed for periodic verification of calibration accuracy.
- For use with all Shore A durometers
- Test kit is serialized for easy traceability
- Durometer results should be within +/-2 Durometer Points of stated test block value.

#### Shore A & D Scale Test Stands

These Phase II test stands are used to improve the accuracy and reproducibility of both analog and digital durometer hardness tester readings by ensuring that the presser foot is exactly parallel to the specimen table.





**PHT-981** 

**Shore D Test Stand** 

## **Coating Hardness Tester**



A set of 14 calibrated wood drawing pencils is included from 6B to 6H.

#### **PHT-995**

The Phase II Coating Hardness Tester is engineered to determine the resistance of coatings to scratch effects on the surface. Utilizing the Wolff/Wilborn principle, this coating hardness tester conforms to ASTM D 3363-05.

Pencils of various known hardness are dragged over the coating surface at a fixed angle and fixed pressure. Beginning with the hardest lead, graduating softer, movements of .250" (6.5mm) will determine where the surface area is/is not being gouged or scratched.

Pencils can be changed easily via a knurled thumb screw on the side of the instrument.







Shown w/optional small parts vise



The PHASE II SRG-2000 surface roughness tester comes complete with a compact durable carrying case, roughness standard, charger and instruction manual.

The SRG-2000 determines surface roughness parameters Ra,Rz, Rms(Rq) and Rt within a wide measuring range. The piezo-electric pick-up stylus with diamond tip assures a very reliable measurement within tolerances that conform to ASME B46.1. Surface Roughness parameter Ra is computed to conform to ISO and Rz is computed to conform to DIN.

Surface Roughness parameter	Ra (ISO), Rz (DIN), Rms(Rq), Rt		
	Ra: 0.05-10.0µm / Rz: 0.1-50mm		
Measuring range	Rg: 0.05 ~ 10.0µm / Rt: 0.1 ~ 50µm		
Resolution	0.01µm (1.6minch)		
Cut-off lengths	0.0009in., 0.03in., 0.09in		
Filter	RC analogue		
Tracing length	0.23in (6mm)		
Tracing speed	0.04in/second (1.0mm/second)		
Accuracy	+/- 12% of actual Value		
Pick-up stylus	Piezo-electric		
Tracer tip	Diamond, radius 5µm		
Operating temperature	32-104 degrees F (0-40 degrees C)		
Power	3.6v / 2xNiMh batteries		
Charger	9V DC		
Contact force on probe	<1.8ozf (<50gf)		
Static measuring force	<0.04=		
of sensor stylus	<0.06ozf (<1.6gf)		
Dimensions	4.9 x 2.8 x 1.0in (125 x 73 x 26mm)		
Weight	0.4lbs (200g)		

#### SRG-2000 Surface Roughness Tester

#### **SRG2000-VISE**

The PHASE II SRG-2000 surface roughness tester is a pocket-sized economically priced instrument for measuring surface roughness texture conforming to traceable standards. It can be used on the shop floor in any position, horizontal, vertical or anywhere in between.

The large LCD display shows either surface roughness parameter Ra, Rz, Rms(Rq) and Rt at the touch of a button, combined with the selected cutoff length. External calibration of the surface roughness values is possible by means of a special CAL button, which makes adjustment of this instrument very easy. A beep signal informs the user about each individual measurement status when ready.

The easy to use SRG-2000 surface roughness tester operates on various surfaces, not only flat but also outer cylinder, outer cone, grooves, and recesses greater than 80x 30mm. The areas of application are wide spread. It is suitable for inspection departments, quality control, on the shop floor during machining, during assembly in the field.

## 58

## Surface Roughness Gauge

#### New!



#### **Technical Specifications:**

- Measures flat, Inside and Outside Diameters
- Measures grooves and recessions: wider than 0.16in (4mm)
- Roughness parameters: Ra, Rz, Rq, Rt, Rs, Rsm, Rmax, Rpc, Rmr
- Roughness standards: ISO/DIN/JIS/ANSI
- Display resolutions:  $0.01 \mu \text{m}/+/-20 \mu \text{m} \mid 0.02 \mu \text{m}/+/-40 \mu \text{m} \mid 0.04 \mu \text{m}/+/-80 \mu \text{m}$
- Measuring accuracy: ≤±10%
- Repeatability: Less than or equal to 6%
- Measuring range: Ra, Rq: 0.01-40µm

Rz,Rt, Rm: 0.02-160µm

- Maximum drive range: 0.7in(17.5mm)
- Cut-off length: 0.009/0.03/0.09inch (0.25/0.8/2.5mm)
- Tracing speeds: speed 1mm/s (sampling length 2.5mm)

speed 0.5mm/s (sampling length 0.8mm)

speed 0.135mm/s (sampling length 0.25mm)

- Sensor: Inductance type
- Sensor-stylus: Diamond, radius 5µm
- Pick up Force: <4mN
- Filter: RC, PC-RC, GAUSSIAN, D-P
- Data output: USB
- Operating temperature: 41°F-104°F (5°-40°C)
- Weight: 0.97lb(440g)
- **Dimensions:** (119 x 47 x 65mm)
- Power: Li-lon rechargeable battery
- · Auto shut-off

#### **Optional Accessories:**

- 1) Precision Support Stand
- 2) Deep Groove Stylus
- 3) Small Hole Stylus
- 4) Curved Surface Stylus
- 5) Stylus Extension
- 6) Data Output Software

#### SRG-4600 comes supplied with:

- Calibrated Reference Standard w/support plate
- Leveling plate
- Stylus protector
- A/C Adapter
- Rugged Carry case

#### Features

- 9 Different roughness parameters
- Inside/Outside Diameters
- Stylus position indicator
- USB output to PC
- Large Memory




#### **SRG-4600**

The newest addition to our state-of-the-art surface roughness testers profilometer, the SRG-4500 will instill the highest level of confidence in your production, shop floor or QC lab. Extended memory and output coupled with multiple useful functions the SRG-4600 surface roughness tester profilometer is clearly the new leader in ultra accurate surface profile testing.


## SRG-4600 Surface Roughness Gauge Accessories 59









Main Screen



**Stylus Position** 



**Parameters** 



**Roughness Profile** 

**Ratio Curve** 



**Precision Support Stand** 

Can be used with either 4000, 4500, 4600 series roughness gauges.



#### SRG4600-200

#### **Deep Groove Stylus**

For use on deep grooves with min. width of 3mm and max depth of 10mm. Must be used with support stand.



SRG4600-100 Standard 5µm Stylus

For use on flat and slightly curved surfaces.



#### SRG4600-500

2" Stylus Extension

Adds extra 2" reach for deeper applications.



#### SRG4600-300 **Small Hole Stylus**

For use in small holes under 2mm diameter and max depth of 4mm.



#### SRG4600-400

#### **Curved Surface Stylus**

For use on curved surface with a minimum curvature radius of 3mm. Must be used with support stand.

#### SRG4600-550

5" Stylus Extension

Adds extra 2" reach for deeper applications.

## 60 Portable Surface Roughness Gauge



#### **Optional Accessories:**

 SRG4000-050
 Precision Support Stand

 SRG4000-110
 Stylus Extension

 SRG4000-130
 2µm Diamond Stylus

 SRG4000-140
 Stylus for Grooves

 SRG4000-150
 Stylus for Curved Surfaces

#### Features:

- 4 Different roughness parameters
- Inside/Outside Diameters
- Stylus Level Indicator



**Dimensions** 

Weight

139mm x 56mm x 48mm

1 lb.

SRG-4000 Surface Roughness Tester
SRG4000-050 Optional Precision Test Stand

# Ultrasonic Thickness Gauge 61 with Scan Feature



#### THE MOST POPULAR MODEL!



Display type	4-digit LCD w/Back Light		
Minimum display unit	0.001"/0.01mm (selectable)		
Measuring Range	0.040-12.0" in steel w/standard probe		
Accuracy	+/- (0.5% thickness + .001")		
Sound velocity range	3280-32805 ft/s (1000-9999m/s)		
Upper/Lower Limit Preset Alarm	Yes		
Operating temperature	32-122 degrees F		
Frequency	5MHz		
Update range	4Hz		
Memory	20 Groups (100 files/group)		
Output	USB		
Mini-Printer	Optional		
Power supply	3v AA alkaline batteries (2pc)		
Battery life	Approx. 100 hours (w/backlight off)		
Power consumption	Working current is less than 3V		
Dimensions	5.90" x 2.91" x 1.30" (150 x 74 x 33mm)		
Weight	8.6oz (245g)		

#### **REFER TO PAGE 66 FOR ULTRASONIC ACCESSORIES**

#### **UTG-2800**

UTG-2800

State of the art, digital tester is packed with features typically found on high end models only. This multi-functional unit offers everything from basic measurement, Scanning Capabilities, Adjustable Sound Velocity, extended memory and USB output capabilities. This dynamic sonic gauge is designed to measure the thickness of metallic and non-metallic materials such as steel, aluminum, titanium, plastics, ceramics, glass and any other good ultrasonic wave conductor as long as it has parallel top and bottom surfaces.

The UTG-2800 will accurately display readings in either inch or millimeter after a simple calibration to a known thickness or sound velocity.

# Ultrasonic Thickness Gauge w/ Thru Coat and Ext. Measuring Range





#### **Measures Thru Paint!**

Display type	4.5 -digit LCD w/Back Light		
Minimum display unit	0.001"/0.01mm (selectable)		
Measuring Range	Pulse-Echo: 0.025″-23.0″ in steel Echo-Echo: 0.118″ – 2.35″		
Accuracy	+/- (0.5% thickness + .001")		
Sound velocity range	3280-32805 ft/s (1000-9999m/s)		
Upper/Lower Limit Preset Alarm	Yes		
Scanning Feature	Yes, 16 measurements/second		
Operating temperature	32-122 degrees F		
Frequency	5MHz		
Update range	4Hz		
Memory	20 Groups (100 files/group)		
Output	USB		
Power supply	AA alkaline batteries (2pc)		
Battery life	Approx. 100 hours (w/backlight off)		
Power consumption	Working current is less than 3V		
Dimensions	5.90" x 2.91" x 1.30" (150 x 74 x 33mm)		
Weight	8.6oz (245g)		

Comes complete with Certificate of Calibration, Operation Manual and Custom Carry Case.

#### **UTG-2900**

Our new State of the art, digital tester is packed with features typically found on high end models only. This multi-functional unit offers everything from basic measurement, Thru Coating capabilities, Scanning Capabilities, Adjustable Sound Velocity, extended memory and USB output capabilities. This dynamic sonic gauge is designed to measure the thickness of metallic and non-metallic materials such as steel, aluminum, titanium, plastics, ceramics, glass and any other good ultrasonic wave conductor as long as it has parallel top and bottom surfaces. The UTG-2900 will accurately display readings in either inch or millimeter after a simple calibration to a known thickness or sound velocity.

# Ultrasonic Thickness Gauge w/A & B 63 Scan and Thru Coating Capability

Operating Principle	Ultrasonic pulse/echo method with dual element probe		
Display type	2.4" Color Screen		
Resolution	0.001", .01" /0.01mm (selectable)		
Measuring Range	0.02-20.0" (10mm-145mm) Dependent upon probe & material		
Repeatability	+/001" (+/-0.05mm)		
Sound velocity range	0.0197-0.3937in/us (500-9999m/s)		
Measuring Error:	0.001"(up to 0.984") 0.007"(up to 3.03" 0.019"( 4" and above)		
Display Modes:	Digital Thickness Readout A-scan or Waveform Min/Max Capture D-Value / Reduction		
V-Path Correction	Automatic		
Update rate	Selectable: 4Hz, 8Hz, 16Hz		
Refresh rate	4/second		
Alarm Settings	Min/Max Alarm Dynamic waveform color change on alarm		
Operating temperature	14-122ºF (-10ºC - +50ºC)		
Auto Shut-Off	After 5 minutes		
Power supply	3v AA alkaline batteries (2pc)		
Operating Time	Approx. 36 hours		
Dimensions	6.02" x 2.99" x 1.45" (153 x 76 x 37mm)		
Weight	9.9oz (280g)		



UTG-4000 Ultrasonic thickness gauge-Blanking



UTG-4000 Ultrasoni Thickness Gauge – Adjustable Gate



UTG-4000 Ultrasonic Thickness Gauge – Configuration Mode



UTG-4000 Ultrasonic Thickness Gauge – Alarm Mode



UTG-4000 Ultrasonic thickness gauge-Blanking



UTG-4000 Ultrasonic Thickness Gauge – Min/Max Mode



UTG-4000 Ultrasonic Thickness Gauge – Color B Scan



#### **UTG-4000**

Utilizing color waveform A-scan and time based B-scan for absolute correctness, this state of the art ultrasonic thickness gauge is packed with useful features allowing users to be confident of the displayed values on the most critical of applications. These multi-functional ultrasonic thickness gauges offer everything from basic measurement, Scan mode with Min/Max viewing, GO/NO GO display, Adjustable Sound Velocity and Thru-Coating Capabilities. This dynamic ultrasonic thickness gauge is designed to measure the thickness of metallic and non-metallic materials in critical situations that ordinary thickness gauges couldn't do.

## 64 Ultra Precise Ultrasonic Thickness Gauge







Display type	4-digit LCD w/ Backlight				
Display Resolution	Inch: 0.01", 0.001" or 0.0001" (selectable)				
Display Resolution	Metric: 0.1mm, 0.01mm or 0.001mm(selectable)				
Measuring Range	Standard Mode: 0.010" – 0.787" (steel)				
Accuracy	+/-0.0002" (0.005mm) if thickness < 3mm				
Accordcy	+/-0.002" (0.05mm) if thickness < 20mm				
Sound velocity range	3280-32805 ft/s (1000-9999m/s) Adjustable				
Upper/Lower Limit Preset Alarm	Yes				
Operating temperature	32-122 degrees F				
Refresh Frequency	4Hz up to 25Hz				
Memory	500 Test Values				
Output	N/A				
Power supply	AA alkaline batteries (2pc)				
Battery Life	Approx. 200 hours (w/backlight off)				
Power consumption	Working current is less than 3V				
Dimensions	5.86" x 2.87" x 1.25" (149 x 73 x 32mm)				
Weight 5.6oz (160g)					

UTG-2650 comes complete with Certificate of Calibration, Couplant Gel, Operation Manual and Custom Carry Case.

#### UTG-2650

State of the art ultrasonic technology allows you to obtain ultra precise thickness measurements and store them to memory. This digital tester is capable of reading wall thickness down to 0.010" with a super high adjustable resolution of up to 0.0001". This dynamic sonic gauge is designed to measure the thickness of metallic and non-metallic materials such as steel, aluminum, titanium, plastics, ceramics, glass and any other good ultrasonic wave conductor as long as it has parallel top and bottom surfaces. The UTG-2650 will accurately display readings in either inch or millimeter after a simple calibration to a known thickness or sound velocity.

## Ultrasonic Thickness Gauge Economy 65



Comes complete with Certificate of Calibration, Couplant Gel, AA Batteries, Operation Manual and Custom Carry Case.

phase II

SELECT

inch

Display type	3-digit LCD
Resolution	0.001"/0.01mm
Measuring Range	0.04" to 8.0"
Sound velocity range	3280-32805 ft/s (1000-9999m/s)
Operating temperature	32-122 degrees F
Frequency	5MHz
Update range	4Hz
Memory	N/A
Output	N/A
Printing	N/A
Power supply	4-AAA batteries
Battery life	Approx. 250 hours/set
Power consumption	Working current is less than 3V
Dimensions	4.9" x 2.6" x 0.9" (161 x 69 x 32mm)
Weight	0.7lbs (300g)
·	<u> </u>

#### **UTG-1500**

This handheld unit has precise touch and read capabilities yet is economically priced. The UTG-1500 is designed to measure the thickness of metallic and non-metallic materials such as aluminum, titanium, plastics, ceramics, glass and any other good ultrasonic wave conductor as long as it has parallel top and bottom surfaces. The UTG-1500 will accurately display readings in either inch or millimeter after a simple calibration to a known thickness or sound velocity.

## 66 Ultrasonic Accessories

Part Number	UTG4000-400	UTG2800-750	UTG2600-400	UTG2000-440	UTG2000-450	UTG2800-400
Probe Style	Standard	Small Tube	Extreme small tube	Rough surface/Porous Metal	Hi-Temp	Standard
Frequency	5MHz (E-E)	7.5 MHz	10 MHz	2 MHz	5 MHz	5MHz
Contact Dia.	8mm	6mm	4mm	17mm	15mm	10mm
Measure range	.031-8.0"	.031-1.18"	.030787"	.157-20"	.157-3.14"	.040-12"
Temperature	14-158ºF	14-158ºF	14-158ºF	14-158ºF	0-572ºF	14-158ºF
Image					4	

Part Number	UTG2900-400	UTG2000-420	UTG1500-400	UTG2000-400	UTG2650-400
Probe Style	Standard	Small Tube	Standard	Standard	Standard
Frequency	5MHz (E-E)	5 MHz	5 MHz	5 MHz	5MHz Delay Line
Contact Dia.	10mm	6mm	8mm	12mm	6mm
Measure range	.031-23.0″	.031-1.18"	.040-8.0"	.040-8.0"	P/E: 0.010" - 0.787" E/E: 0.012" - 0.394"
Temperature	14-158ºF	14-158ºF	14-158ºF	14-158ºF	14-158ºF
lmage					



1018 Steel .100" thru .500"





#### UTG1000-850 Couplant Gel 5-Liter

#### UTG1000-808 Couplant Gel 8oz

- Water based and water soluble
- Slow drying with good transducer lubrication
- Extended ambient temperature range
- Stable couplant that holds on a vertical and overhead surfaces and fills depressions in rough surfaces
- MSDS available by request





#### Main Technical Data:

• Measuring range: 0-1,250 µm max. or 0-50 mils

• Resolution: 1 µm/0.1 mils (0-99 µm)

• Accuracy: +/- 3% + 2 µm ( +/-3%+0.1 mil )

• Display: 3 digit color LCD

• Single or Continuous Measurement: Selectable

• Min. measuring area: 0.2" x 0.2" (5mm x 5mm)

• Min. radius of curvature: Convex: 0.12" (3mm)

Concave: 1.2" (30mm)

• Min. substrate thickness: Ferrous: 20 mils (0.5mm)

Non-ferrous: 2 mils (50 µm)

• Max. Surface temperature of test object: 302 degrees F

(contact time max is 2 seconds)

• Power Source: 2-AAA batteries

• **Dimensions:** 100 x 52 x 29mm

• Weight: 2.4oz. (w/o Batteries)



#### **PTG-4000**

The PHASE II PTG-4000 can perform two different methods of calculating thickness measurement by utilizing the characteristics of both eddy current and magnetic induction. Testing performance is both non-destructive and extremely accurate. With this state of the art thickness gage, you can easily detect the thickness of nonmagnetic coating on a magnetic substrate (ferrous) or an insulating coating on a non-magnetic conductive substrate (non-ferrous) utilizing our auto-detect, integrated probe Can be used in many areas of industry including automotive auctions, manufacturing, general engineering, commercial inspection, etc.

Utilizes an integrated probe that can automatically detect a Ferrous or Non-Ferrous substrate and comes with 2 substrate samples(steel, aluminum), 4 calibrated thickness samples, carry case, batteries and operation manual.

## 68 Coating Thickness Gauge





#### Main Technical Data:

- Measuring range: 0-1000µm or 0-40mils
- Resolution: 0.1 μm/0.01 mils(0-99 μm)
  or 1 m m (over 100 μm)
- Guaranteed tolerance: After one-point calibration: =/- 1-3%n or 2 μm (whichever is greater)
- Display: 4 digits
   (digit height = 10mm/0.4")
- Min. measuring area: 0.2" x 0.2" (5mm x 5mm)
- Min. radius of curvature: Convex: 0.12"
   (3mm) Concave: 1.2" (30mm)
- Min. substrate thickness: Ferrous: 20 mils (0.5mm) Non-ferrous: 2 mils (50 mm)
- Calibration:

Zero Calibration/Foil calibration

- \* Max. Surface temperature of test object: 302 degrees F (contact time max is 2 seconds)
- Power source: 4-AAA batteries
- **Dimensions:** 161 x 69 x 32mm
- Weight: 9oz. (260g)

#### Coating thickness measurement with Flip Display!

#### PTG-4200

The PHASE II PTG-4200 can perform two different methods of calculating thickness measurement by utilizing the characteristics of both eddy current and magnetic induction.

#### Testing performance is both non-destructive and extremely accurate.

With this state of the art thickness gages, you can easily detect the thickness of nonmagnetic coating on a magnetic substrate (ferrous) or an insulating coating on a nonDmagnetic conductive substrate (nonDferrous) utilizing our autoDdetect, integrated probe.

The PTG-4200 coating thickness gauge can be used in many areas of industry including automotive auctions, manufacturing, general engineering, commercial inspection, etc.



#### PTG-3700/3725

The PHASE II PTG-3700 series of gauges can perform two different methods of calculating thickness measurement by utilizing the characteristics of both eddy current and magnetic induction.

#### Testing performance is both non-destructive and extremely accurate.

With these state of the art thickness gages, you can easily detect the thickness of non-magnetic coating on a magnetic substrate (ferrous) or an insulating coating on a non-magnetic conductive substrate (non-ferrous) utilizing either an integrated probe or our version that comes with an external probe.

The PHASE II PTG-3700/3725 can be used in many areas of industry including automotive paint measurement, manufacturing, general engineering, commercial inspection, etc.

The PTG-3700 utilizes an integrated probe that can automatically detect a Ferrous or Non-Ferrous substrate and comes with 2 substrate samples (steel, aluminum), 4 calibrated thickness samples, carry case, batteries and operation manual.

The PTG-3725 utilizes two external probes for ferrous and non-ferous substrates. Comes with 2 substrate samples(steel, aluminum), 4 calibrated thickness samples, carry case, batteries and operation manual.

## Coating Thickness Gauges



#### Main Technical Data:

YEAR

- Measuring range: 0-1000µm or 0-40mils
- **Resolution:** 0.1µm/0.01mils(0-99µm) or 1m m (over 100µm)
- Guaranteed tolerance: After one-point calibration: =/- 1-3%n or 2 µm (whichever is greater)
- Display: 4 digits (digit height = 10 mm/0.4")
- Min. measuring area: 0.2" x 0.2" (5mm x 5mm)
- Min. radius of curvature: Convex: 0.12" (3mm) Concave: 1.2" (30mm)
- Min. substrate thickness: Ferrous: 20 mils (0.5mm) Non-ferrous: 2 mils (50 mm)
- Calibration: Zero Calibration/Foil calibration
  - \* Max. Surface temperature of test object: 302 degrees F (contact time max is 2 seconds)
- Power source: 4-AAA batteries
- **Dimensions:** 161 x 69 x 32mm
- Weight: 9oz. (260g)

#### PTG-3500

The PHASE II PTG-3500 series of gages can perform two different methods of calculating thickness measurement by utilizing the characteristics of both eddy current and magnetic induction. Testing performance is both non-destructive and extremely accurate. With these state of the art thickness gages, you can easily detect the thickness of non-magnetic coating on a magnetic substrate (ferrous) or an insulating coating on a non-magnetic conductive substrate (non-ferrous) utilizing either an integrated probe or our version that comes with an external probe. The PHASE II PTG-3500 can be used in many areas of industry including manufacturing, general engineering, commercial inspection, etc.

Comes with 2 substrate samples(steel,aluminum), 4 calibrated thickness samples, carry case, batteries and operation manual.





00000		
	phus II	
	FORCE CALICE	

WARRANTY

	Features:
	Heavy-Duty Construction
١	Direct Dial Readings in lbs/kg
	• Extreme Accuracy to +/- 1% Full Scale
	Designed for tension/compression measurements
	Versatile range of gages are supplied in complete test kit
	form containing full set of accessories and carry case.
	Can be hand-held or mounted to optional test stand

Model No.	Capacity	Resolution
AFG-0100	2 lb/0.90kg	0.01
AFG-0200	4.5 lb / 2.0kg	0.02
AFG-0300	10 lb/4.53kg	0.05
AFG-0400	22.5 lb / 10kg	0.1
AFG-0500	50 lb/22.67kg	0.25
AFG-0600	100 lb/45.36ka	0.5

AFG-0100 2lb Analog Force Gauge


AFG-0200 4.5lb Analog Force Gauge

AFG-0300 10lb Analog Force Gauge

AFG-0400 22.5lb Analog Force Gauge


AFG-0500 50lb Analog Force Gauge

AFG-0600 100lb Analog Force Gauge

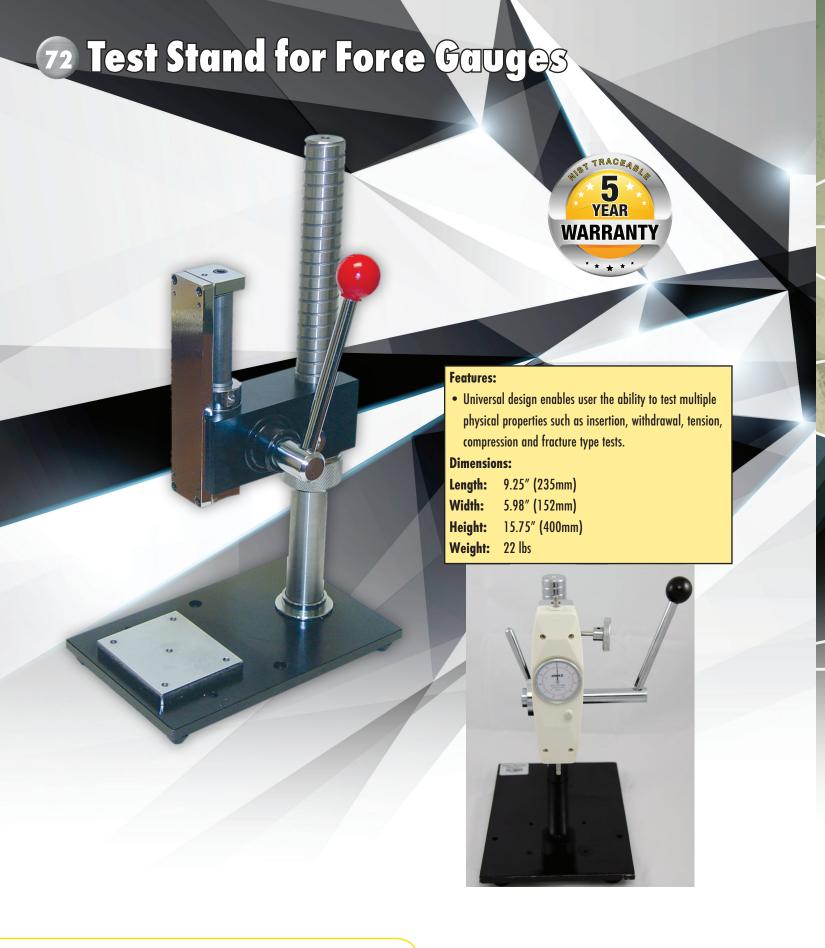

### **AFG-1000**

Universal design enables user the ability to test multiple pysical properties such as insertion, withdrawal, tension, compression and fracture type tests

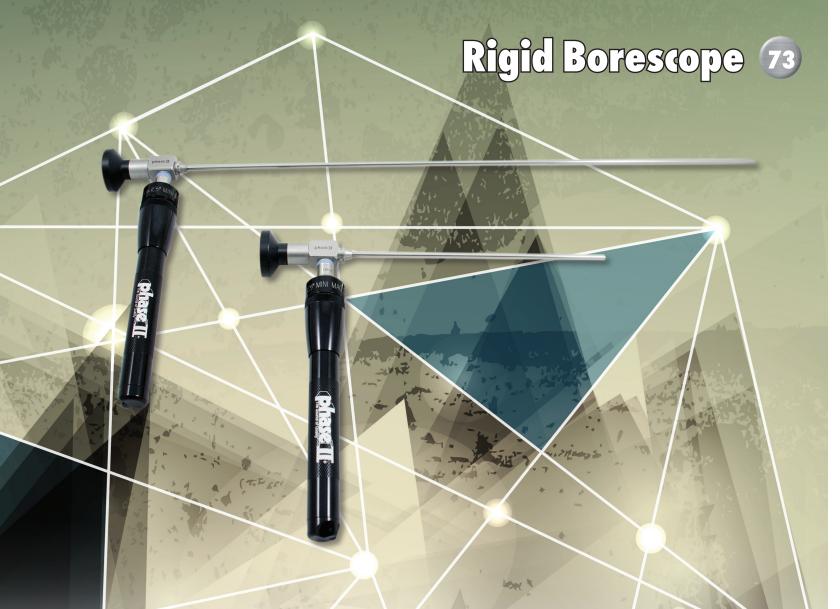


Dimensions	RGB-1000	
Working Length	7"	
Overall Length	9"	
Diameter of tube	.160" (4mm)	
Field of View	65° Wide Angle	
Magnification	2x	

#### Features:

- Portable, rugged design enables user to view critical components in high resolution through access holes as small as .160" (4mm).
- RGB-1000 Utilizes a Super bright LED Light source operated by 2 AA Batteries
- Built-in light source affords user extreme versatility anywhere in the shop.

RGB-1000 7" Rigid Borescope Kit

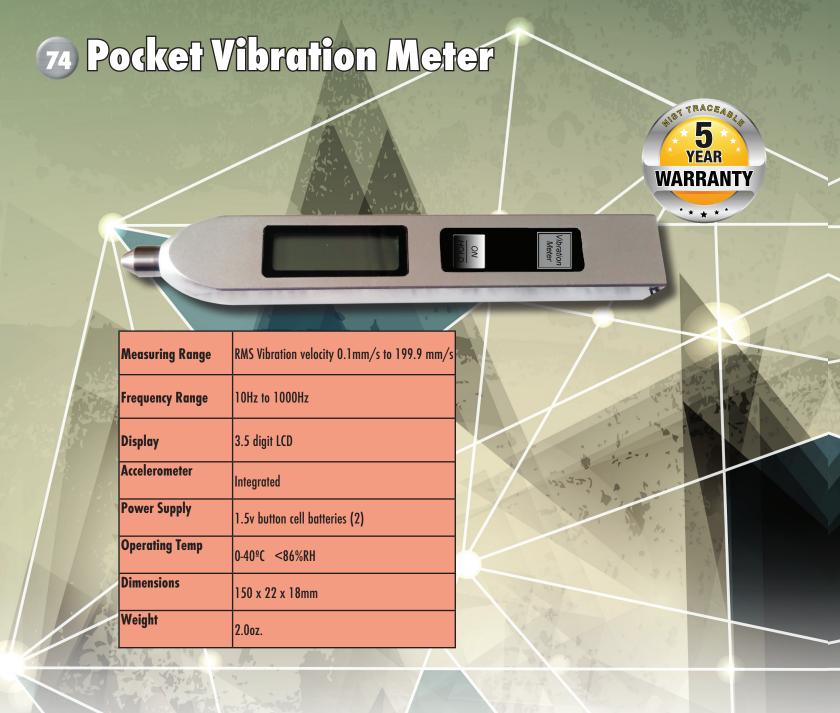

# DVM-0500/0600 comes complete with Certificate of Calibration, Operation Manual and Carry Case.

### **DVM-0500 Pocket Vibration Meter (mm)**

## **DVM-0600 Pocket Vibration Meter (in)**

The DVM-0500/600 is a hand held device that is designed to aid in the preventative maintenance of machinery or any other object in motion by picking up vibrational changes over a period of time. Commonly used to check balance, misalignment of bearings. Useful features include last value hold and auto shut off make the DVM-0500/600 a must have for maintenance personnel.



Acceleration	Peak Value: 0.1-400m/s² or	Frequency Range: 10Hz-1KHz	
	0.3-1312ft/m/s	Frequency Range: 10Hz-10KHz	
Velocity(RMS)	RMS: 0.1-400 (mm/s)	Frequency Range: 10Hz-1KHz	
	or 0.004 -16.0 inch/s		
Displacement	peak to peak: 0.001-4.0mm or	Frequency Range: 10Hz-500Hz	
	0.04-160mil 10Hz-1KHz		
RPM Frequency	5-100,000 r/min		
Frequency	0.1 - 10KHz		
Accuracy	<5%		
Operating Temp 0-45°C			
Power 4-AAA Batteries			
<b>Dimensions</b> 161 x 69 x 32mm			
Weight	10.5 oz.		

Multi-functional meter is capable of measuring Velocity, Acceleration, Displacement and RPM Frequency.

#### Features

- Quick accurate analysis for checking balance and alignment of a rotating object.
- Large LCD display
- Statistics: Mean, Max, MIN, No. of Measurements and Std deviation
- Inch/Metric Conversion with the push of a button
- Max Hold Function
- Regulated Output(AC output 2.0v peak full scale

#### DVM Includes:

- 1-Powerful Magnet
- 1-Accelerometer
- 1-Stinger Probe (cone)
- 1-Stinger Probe (Ball)
- Operation Manual
- Carry Case

**DVM-1000 Digital Vibration Tester** 



Acceleration	Peak Value: 0.1 - 400 m/s or 0.3-1312 ft/s²; 0.0-40g	Frequency Range: 10Hz-10KHz
Velocity(RMS)	RMS: 0.1-400 (mm/s)	
Displacement	Displacement peak to peak: 0.001-4.0mm or 0.04-160mil 10Hz-1KHz	
Accuracy	Accuracy +/-5%N+0.2	
Operating Temp	32-120°F / <95%RH	
Power	2-AA Batteries	
Dimensions	Dimensions 130 x 70 x 30mm	
Weight	305g	

- 1-3-Axis Accelerometer
- 1-Stinger Probe (point)
- 1-Stinger Probe (Ball)
- Operation Manual
- Carry Case



#### **DVM-1600**

#### **Applications:**

The DVM-1600 vibration calibrator is an integrated shaker type system that is designed to test accelerometers, vibration monitoring equipment and recording systems. The DVM-1600 provides a known and controlled RMS vibration for verification of accelerometers weighing up to 150g.



## "The Source of Quality"

21 Industrial Ave. Upper Saddle River, NJ 07458
Phone: 201-962-7373 • Fax 201-962-8353
www.phase2plus.com
email: info@phase2plus.com

# We take pride in the products we sell and the services we provide:

- Instrumentation that is engineered for accuracy and dependability
- New product development and innovation
- Access to calibration/certification services
- Highest level of customer satisfaction
- Expert technical assistance
- On-time delivery
- Website: www.phase2plus.com for access to our complete product line as well as our tradeshow schedule, manuals and tables.
- 5-Yr Warranty against mfr defects on all instruments except for consumable parts
- International Product Sourcing:
   Refer to our website www.phase2plus.com for detailed information.

Call us for more information.


We guarantee that your product will be manufactured to the highest degree of quality and shipped according to schedule.

Thank you for your continued support and we look forward to serving you in the future.

# www.phase2plus.com

Please be sure to visit our constantly updated website for the latest products and information from Phase II. Here you will find our full line broken down into easy to navigate groups where you can access product specifications, pictures, instructional videos and more.

We also offer informational links to ASTM, NIST as well as user friendly resources for each category.

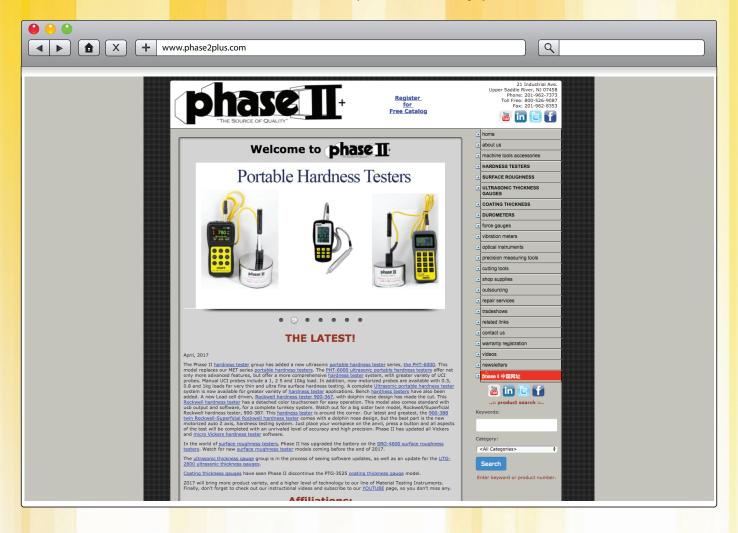

### Don't forget to check out our machine tool accessories and measuring instruments!







# Well-Renowned Phase II Customers

3M 3M Canada A.O.Smith ABB Aero Turbine **Aerospace Coatings** International Aerospatiale Hemingford Air Liquide Airflow Research AKG Akebono Brake Co Alcog **Alcoa Howmet Castings Alcoa Thermatech Coatings Allison Transmission** Alstom Alstom Power American Drill Bushings **American Eagle Airlines** American Racing American Roller Bearing Amtrak Anderson Brothers Construction **Arcelor Mittal** Archer Daniels Midland **Arias Pistons Arias Pistons Arizona State University Array Technologies** Arrow Engine Co. Atlas Tube **BAE Systems Baker Hughes** Baldor **BASF Bechtel Becton Dickinson Bodycote** Boeina Bombardier **Borg Warner** Bosch **Braun Electric** Bridaestone **British Petroleum Burgess Norton Burton Snowboards** Carestream Health Cargill Carr Lane Mfg Caterpillar Champion

Chevron Oil

Chick Workholding Chromallov Cobham Defense Con Edison Con Edison Power Conoco Coors Tek Corning Cummins **Curtiss Wright** Dana Corp **DB** Cylinder Heads **Detroit Diesel** Dresser Rand **Dynamic Aviation** E.I.Dupont **EADS** Earnhardt-Childress Racing **East Kentucky Power** Eaton **Electric Boat** Elkav Mfa **Evergreen Airlines Evernham Engines Experior Photonics** Federal Signal **Fleetwood Enterprises** Florida Institute of Technology Flowserve Fluor Corp Ford Motor Co. Ford Performance Racing Fox Valley Energy Franklin Fueling Systems Freiahtliner FSU **Garmin Intl GATX Rail Corp** General Electric (GE) **General Mills General Motors** Genlyte Group George Washington Univ Georgia Pacific Gibson USA Gillette Racing **GKN** Aerospace Glaxo Smith Kline

Goodyear

Guhring, Inc.

Halliburton

Haven Steel

Haas Automation

**Hendrick Motorsports** 

Graco

Hitachi Metals Holokrome Honda Honeywell **Hughes Christensen** Idaho Armored Vaults Ideal Steel Iliin USA **Ingalls Shipbuilding** Ingersoll Rand Innovation Medical Intel Corp Intercomp International Crankshaft Intertek ITT Industries **Jet Aviation** Jindal Aluminum John Crane John Deere **Johns Hopkins** Johnson & Johnson **Johnson Controls** Kaiser Aluminum **KB** Racing Kellogg Kennemetal Keyspan Energy **Keystone Automotive** Kimball Electronic Lab Klein Tools Kohler **Kone Cranes** Krazy Glue L3 Communications LG Electronics **Liberty Mutual Insurance** Lincoln Forge LMI Aerospace Lockheed Martin Los Alamos National Labs **Lufkin Industries** Mack Trucks **Manitowoc Cranes** Mars Racing Mauser Maxitrol Merit Gear Corp Messier-Buaatti Misco Mitsubishi Electric Power Mitsubishi Hitachi Power Systems

Motorola

Nanosolar

**NASA Lanaley NASA Marshall** Naval Surface Warfare Navistar **NC State University New York University** Nissan Nissin Brake Northlake Steel **Novartis Pharmaceuticals NTN-Bower Corp Nucor Steel** Nuweld **NYC Transit Ohio State University OK State University** Oshkosh Corp Otis Elevator **Owens Corning** Parke Hannifin Penn State University **Penske Jasper Engines** Philips Oil Port Authority of NY/NJ **Pratt & Whitney** Praxair, Inc. Precoat Metals **Proctor & Gamble** Purdue Univ. Quantum Precision **Quest Testing Services** Raybestos Powertrain Raytheon Rcohester Machine Reactive Nano Technologies Reliance Machine Reliant Energy Rocky Mountain Steel Mill Roush-Yates Racing Safety Kleen Saint Gobain Abrasives Sandia National Labs Sandvik Sanofi-Aventis Sapa Extrusions Schering-Plough Schlumberger Schunk SGS Siemens Stihl Stryker **Sulzer Pumps Summit Racing** Taurus Arms

Taylor Made Golf **TCI Precision Metals** Tektronix Tennessee Gas **TESLA** Thermo-Fisher Scientific Thornapple Steel Thyssen Krupp Timken **Toronto Transit** Tovo Seat Toyota **Trelleborg** Trescal Triumph Drilling TRW **Turbine Popwer Solutions TUV Rheinland TUV SUD** Tvco U.S. Air Force U.S. Army U.S. EPA U.S. Geological Survey U.S. Marine Corps. U.S. Navy U.S. Pipeline U.S. Tsubaka United Launch Alliance Universal Steel Universal Studios Orlando University of Arkansas University of Maine University of Massachusetts University of Minnesota University of New Zealand University of Texas-Austin University of Utah Universoty of Ottawa **US Army Corps of Engineers US Coast Guard UTC** Aerospace Virginia Public Utilities Virginia Tech **Voest Alpine Vulcan Materials** W.L.Gore Walker Forge **Washington State University** Weatherford **Weld Racing** Westinghouse Wilwood Engineering Yamaha Motor Mfg.





Phase II Machine & Tool, Inc.
21 Industrial Ave. • Upper Saddle River, NJ. 07458 USA

Tel: (201) 962-7373 Fax: (201) 962-8353

General E-Mail: info@phase2plus.com

www.Phase2Plus.com

Version 2018